



## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: A. Ishikawa et al. : Art Unit:  
Serial No.: To Be Assigned : Examiner:  
Filed: Herewith :  
FOR: GATEWAY APPARATUS :  
AND THE METHOD  
THEREOF

## PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

S I R :

Prior to examination, please amend the above-identified application as follows:

IN THE SPECIFICATION:

On page 11, line 19, please insert the following paragraphs:

--Here, the SwHandle is calculated as follows:

- 1) Acquire pseudo addresses already used from the Address correspondence controller.
- 2) Then take the last 16bit from each pseudo address acquired. They are SW-Handles already used.
- 3) Select the smallest positive integer excluding "SW-Handle"s reserved for HAVi system components and SW-Handles took out in 2) above.
- 4) HAVi pseudo address is generated by putting a device's own

GUID on the first 64 bit and the "SW-Handle" on the last 16 bit selected in 3) above in HAVi address format as shown in Fig.3.--

Respectfully Submitted,

Lawrence E. Ashery, Reg. No. 34,515  
Jacques L. Etkowicz, Reg. No. 41,738  
Attorneys for Applicants

LEA/lm  
Suite 301  
One Westlakes, Berwyn  
P.O. Box 980  
Valley Forge, PA 19482-0980  
(610) 407-0700

The Assistant Commissioner for Patents is hereby authorized to charge payment to Deposit Account No. **18-0350** of any fees associated with this communication.

**EXPRESS MAIL** Mailing Label Number: EL635062280US  
Date of Deposit: June 26, 2000

I hereby certify that this paper and fee are being deposited, under 37 C.F.R. § 1.10 and with sufficient postage, using the "Express Mail Post Office to Addressee" service of the United States Postal Service on the date indicated above and that the deposit is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Kathleen Libby

P23187

## Gateway Apparatus and the Method Thereof

### Field of the Invention

5       The present invention relates to a gateway (GW) device which realizes communications between a plurality of electronic devices hooked up to a network (HAVi network) — the devices being in accordance with the specification of the Home Audio/Video (HAVi) architecture — and other devices hooked up to another network, e.g. the internet. The present invention also relates to a  
10       method of the gateway.

### Background of the Invention

HAVi is a middle ware — a software disposed between an application and an OS — and allows home-use audio/video devices (AV devices) to be controlled.  
15       The controlling targets of HAVi are the audio/video devices in accordance with IEEE 1394. The HAVi specification has disclosed an inter-operation by linking AV devices with each other as well as a Plug-and-Play function that allows users to operate AV devices just by hooking up the devices to the HAVi network.

20       The HAVi specification in detail is introduced in a home-page of <http://www.havi.org/>. Meanwhile, various network-services in accordance with the internet protocol (IP) are available outside the homes, and an art realizing the Plug-and-Play among the devices hooked up to the internet has been already disclosed.

25       In order to realize a communication between the device on HAVi network and the device on the internet, the following problems should be overcome.

1. A gateway (GW) apparatus accommodating differences in physical specifications and network protocols is required. Because in these two factors,

the HAVi devices following the communication protocol of HAVi specification and the devices (IP devices) on the internet following the internet protocol (IP) differ with each other.

To realize the "Plug-and-Play", in particular, between the HAVi devices  
5 and the IP devices, the following two problems, i.e. items 2 and 3, should be overcome.

2. In order to manipulate a device plugged in the IP network (second network) from the HAVi network (first network), a user should firstly be informed that the device in the IP network is plugged in. Next, a target  
10 address such as a Uniform Resource Locator (URL) and an appropriate communication protocol should be obtained. Then the user accesses to the IP device following a process required.

3. When a user wants to manipulate the HAVi device from the IP network, the user should firstly be informed that the HAVi device is plugged in.  
15 Next, the user should obtain a target address for accessing to the HAVi device and a connecting process.

4. A stream transfer of audio and video information is assumed in the HAVi specification, and the transfer is limited within the HAVi network. A method of transferring stream information between IP devices and HAVi devices  
20 is required.

5. The HAVi specification provides the users with a graphical user interface (GUI) for improving operability of the HAVi devices. Therefore, a method of utilizing the GUI from the outside of the HAVi network is required.

6. When a GW function is prepared for overcoming the first problem  
25 discussed above, the information available in a GW apparatus may be not enough for creating a reciprocal-conversion protocol between the HAVi network and another network.

0092290" 85930960

### Summary of the Invention

The present invention addresses the problems discussed above and aims to provide a gateway (GW) apparatus and a GW method for allowing the HAVi  
 5 devices and devices hooked up to another network, e.g. the internet, to communicate with each other.

The GW apparatus of the present invention comprises the following elements:

first message input/output means, being coupled to a first network, i.e.  
 10 HAVi network hooking up a plurality of devices, for sending/receiving a message to/from the first network;

second message input/output means, being coupled to a second network hooking up a plurality of devices, for communicating to an IP device through an IP protocol used in the internet;

15 first plug-in detector for detecting a device being plugged in to the first network;

a virtual device for providing a GW function which allows a communication between a device on the first network and a device on the second network with each other;

20 a virtual device controller for providing the virtual device — corresponding to the device plugged in — with an IP identifier upon receiving a notice of plug-in from the first plug-in detector, the IP identifier indicating an address for accessing from the second network to the device plugged in, so that the virtual device is ready for a connection command;

25 a pseudo address generator for generating a pseudo address upon receiving a connection command from a device on the second network to allow the virtual device to communicate with a device on the first network; and

00603698 062600

an address correspondence controller for controlling correspondence between an address provided to the virtual device and an IP identifier for accessing from the second network.

The structure discussed above allows the communication between the  
5 devices hooked up to the first and second networks.

### Brief Description of the Drawings

Fig. 1 is a block diagram showing a function of a GW apparatus in accordance with a first exemplary embodiment of the present invention.

10 Fig. 2 is a structure of a virtual device in accordance with a first exemplary embodiment of the present invention.

Fig. 3 illustrates a structure of a HAVi address.

Fig. 4 illustrates a command table showing correspondence between HAVi and IP in accordance with the first exemplary embodiment of the present  
15 invention.

Fig. 5 illustrates an address table showing correspondence between HAVi and IP in accordance with the first exemplary embodiment of the present invention.

Fig. 6 illustrates an address for accessing to a GW apparatus in  
20 accordance with the first exemplary embodiment of the present invention.

Fig. 7 is a flowchart showing a plug-in operation of the GW apparatus in accordance with the first exemplary embodiment of the present invention.

Fig. 8 is a flowchart illustrating an operation of the GW apparatus at receiving a connection command.

25 Fig. 9 is a block diagram illustrating a function of a GW apparatus in accordance with a second exemplary embodiment of the present invention.

Fig. 10 is a flowchart illustrating an operation of an IP plug-in detector in

009230" 86930960

accordance with the second exemplary embodiment of the present invention.

Fig. 11(a) is a flowchart illustrating an operation of a virtual device controller at plug-in in accordance with the second exemplary embodiment of the present invention.

5 Fig. 11(b) is a flowchart illustrating an operation of the virtual device controller at removing a device in accordance with the second exemplary embodiment of the present invention.

10 Fig. 12 is an address-table showing the correspondence between HAVi side and IP side in accordance with the second exemplary embodiment of the present invention.

Fig. 13 a service-table showing the correspondence between HAVi side and IP side in accordance with the second exemplary embodiment of the present invention.

15 Fig. 14 is a block diagram illustrating a function of a GW apparatus in accordance with a third exemplary embodiment of the present invention.

Fig. 15 is a flowchart illustrating an operation of a HAVi plug-in detector in accordance with the third exemplary embodiment of the present invention.

20 Fig. 16(a) is a flowchart illustrating an operation of a virtual device controller at plug-in in accordance with the third exemplary embodiment of the present invention.

Fig. 16(b) is a flowchart illustrating an operation of the virtual device controller at removing a device in accordance with the third exemplary embodiment of the present invention.

25 Fig. 17 is a block diagram illustrating a function of a GW apparatus in accordance with a fourth exemplary embodiment of the present invention.

Fig. 18 illustrates an operation sequence for establishing a stream connection in accordance with the fourth exemplary embodiment of the present

009290 8690960



invention.

Fig. 19 illustrates an operation sequence for discontinuing the stream connection in accordance with the fourth exemplary embodiment of the present invention.

5 Fig. 20 is a plug-control-table in accordance with the fourth exemplary embodiment of the present invention.

Fig. 21 is a block diagram illustrating a function of a GW apparatus in accordance with a fifth exemplary embodiment of the present invention.

10 Fig. 22 illustrates an operation sequence of the GW apparatus in the fifth embodiment for obtaining information of Data Driven Interaction (DDI).

Fig. 23 illustrates an operation sequence of GUI in the fifth embodiment

Fig. 24 shows a GUI based on DDI information in accordance with the fifth exemplary embodiment of the present invention.

15 Fig. 25 shows DDI information in accordance with the fifth exemplary embodiment of the present invention.

Fig. 26 shows a GUI code

20 Fig. 27 is a block diagram illustrating a function of a GW apparatus in accordance with a sixth exemplary embodiment of the present invention.

Fig. 28 shows information down-loaded from a virtual device in accordance with the sixth exemplary embodiment of the present invention.

25 Fig. 29 is a flowchart illustrating an operation of down loading the virtual device in accordance with the sixth exemplary embodiment of the present invention.

## Description of the Preferred Embodiments

### Exemplary Embodiment 1

A gateway (GW) apparatus in accordance with the first exemplary embodiment of the present invention is hereinafter demonstrated with reference to the accompanying drawings. All the descriptions in this embodiment are in accordance with the specification of HAVi 1.0 beta; however, the present invention is not limited to an edition of HAVi.

In Fig. 1, HAVi devices 101 include AV devices such as a digital television receiver (DTV), a video tape recorder (VTR) and the like. The AV devices are in accordance with the HAVi specification, and are connected to HAVi network (first network) 102. GW apparatus 103 is disposed between the IP network (second network) 104 and the HAVi network 102, and functions to allow the devices hooked up to the first and second networks to communicate with each other. GW apparatus is also equipped with a function corresponding to Full AV device (FAV) specified by the HAVi specification. The IP devices 105, i.e. the devices hooked up to the second network, include a network printer and other network devices.

HAVi plug-in detector 106 monitors an event broadcast to the HAVi network. When detector 106 detects a plug-in of an HAVi device, the detector informs virtual-device-controller 107 of the detection. Controller 107 prepares an address which allows the GW function using a virtual device to be valid, and makes the virtual device be on standby.

Pseudo address generator 108 generates addresses of the HAVi devices and IP devices for network entities to communicate with the virtual device. Address correspondence controller 109 controls the connections between the HAVi devices and IP devices as well as the correspondences of pseudo addresses supplied to respective devices. HAVi message input/output means 110 (first message input/output means) functions as an interface between the GW

apparatus and the HAVi devices.

Virtual device 111 functions as a GW converting a communication protocol, thereby manipulating either the HAVi devices from the IP network or the IP devices from the HAVi network. IP network input/output means 112  
 5 (second network input/output means) functions as an interface between the virtual device and the IP network.

The following description is referred to Fig. 2. Connection controller 202 controls the correspondences between the devices communicating over the GW. Command converter 203 converts commands supplied from the HAVi network  
 10 and IP network into commands the targets can comprehend. The corresponding commands which command converter 203 refers to are controlled by command-correspondence-controller 204. The corresponding information to the commands may be controlled as a database stored outside the virtual device. If the corresponding information has been standardized in advance, general-  
 15 purpose devices can be used as the virtual devices. Address converter 205 converts a target address and a source address, so that a message the GW receives can be transferred to another network. Interface 206 functions as an interface between the GW apparatus and IP network input/output means 112. Interface 207 functions as an interface between the GW apparatus and HAVi  
 20 network input/output means 110.

An address structure of HAVi is described with reference to Fig. 3. HAVi address 301 comprises the following elements:

identifier (ID) 302 assigned to respective HAVi devices; and

ID 303 assigned for distinguishing HAVi software elements in the  
 25 devices, and ID 303 is thus called a software element ID (SEID). The HAVi software element communicates with other software elements using the SEID. ID 302 assigned to an HAVi device is called a global unique ID (GUID) and is a

64-bit identifier specified by the global identifier (EU164) defined by IEEE. A Sw-Handle assigned for distinguishing a software element in a device is a 16-bit identifier. The SEID thus forms an 80-bit stream. In this first embodiment, the SEID of a combined GUID with Sw-Handle is described "GUID-Sw-Handle" in order to avoid a long description.

In a command-corresponding table of Fig. 4, HAVi command 402 corresponds to internet service command 403 on the same line. This information may be stored in an independent database, and this correspondence may be programmed.

In the table shown in Fig. 5 — the table controlling the address-correspondence between the HAVi and the internet — column 502 stores a connection between the GW apparatus and IP devices communicating with the virtual HAVi device. The connection of column 503 on the same line indicates a corresponding address (SEID) of the HAVi side. Further, the same line of column 504 indicates an access identifier to the internet. In this example, it is assumed that the HAVi GUID of the GW apparatus is "10" and an identifier on the IP side is "192.0.0.1".

Fig. 6 shows an address used in the access to the GW apparatus from the HAVi and the IP side respectively. An address-assignment to a virtual VTR and IP client 1 is shown in Fig. 5. From the IP side, an access is done to the address of "192.0.0.1:8080", and the return access from an HAVi device is addressed to "10-2".

Based on the flowchart in Fig. 7, an operation of the GW apparatus when an HAVi device is plugged in the HAVi network is demonstrated with reference to Figs. 1 and 2.

The HAVi device plugged in the HAVi network broadcasts the plug-in to the HAVi network and an event noticeable to the other HAVi devices, e.g. a new

Plug-in detector 106 monitors this event, and when detector 106 detects the plug-in event, the detector obtains the HAVi address (SEID) of the plug-in device, the address being additional information to the event (step 701).

The detector then obtains information attributive to the plugged-in device such as a type of device, a device ID, a maker ID (step 703).

The following methods are available for preparing the virtual device:

- Fig. 2 shows a structure of virtual device 111 to be a GW.

Then, the identifier is registered to address-correspondence-table 501 (step 706).

The steps discussed above describe an operation-stream shown in Fig. 7.

An operation of GW after the GW apparatus received a connection request from the IP device is described based on the flowchart of Fig. 8 with reference to Fig. 1 through Fig. 6.

When an access requirement is sent from the IP side (step 801), virtual  
5 device controller 107 requests pseudo-address-generator 108 to generate a  
virtual HAVi address in order to reply from the HAVi side via the GW to the  
requirement from the IP client.

The HAVi address comprises a Global Unique ID (GUID) and a Software Handle (SwHandle) as shown in Fig. 3. The GUID is to distinguish all the HAVi devices uniquely, and the SwHandle is an identifier for distinguishing the software element in an identical HAVi device from other software elements. The SwHandle is controlled in each HAVi device independently. This address system requires a pseudo address of the virtual device receiving the reply as a representative of the IP clients to be embodied the GUID as an HAVi compatible device of the GW apparatus including virtual device 111.

Therefore, pseudo-address-generator 108 obtains the GUID of the GW apparatus (step 802), and calculates and provides a SwHandle so that the HAVi address in the device is unique to the device (step 803).

This newly generated HAVi address is supplied to virtual device controller 107. In the same manner as shown in the address-corresponding-table in Fig. 5, controller 107 registers a combination of HAVi address 503, address 504 for accessing from the IP side, and a pair of the target devices 502 (HAVi device and an IP client) on address-corresponding-means 109 (step 804).

In this embodiment, the HAVi address is supplied to the virtual device at  
25 the access from the IP side; however, the address can be assigned to the device  
prior to the access from the IP side.

In an example shown in Fig.5, the GUID of GW is assumed "10", the IP

address is assumed "192. 0.0.1", and the HAVi device accessed by an IP client is assumed a VTR. In the GW apparatus, a plurality of virtual devices may sometimes wait for connections, therefore, a port ID number of the virtual VTR device is set at "8080" for distinguishing the present connections from possible  
5 connections. However, the connections are not necessarily controlled by a set of an IP address and a port number.

The virtual device obtains a message from the IP side after registering a correspondence between a connection and an address (step 805).

10 The virtual device converts the HAVi command corresponding to a command called from the IP side into HAVi command referring to the command-corresponding-table shown in Fig. 4 (step 806).

For instance, when an IP client calls a command of RPCPlay(), the virtual device calls an HAVi command of VTR::Play() corresponding thereto.

15 When completing the command conversion, the virtual device drafts an HAVi message whose source HAVi address is the pseudo address assigned to the virtual device, and whose target is the HAVi address of the VTR to communicate with. Then the virtual device sends the message to the target HAVi device 101 using HAVi message input/output means 110 (step 807).

20 Device 101 (VTR) performs a designated operation upon receiving the message, and sends a reply-message to the virtual device of the GW if necessary.

The communication is forwarded in the same manner until the connection is discontinued (step 805 - step 808).

25 When either one of the HAVi devices or IP devices requires the connection be discontinued, the virtual device realizes the requirement (step 809) and closes the connections on the HAVi side and IP side respectively (step 810).

At the same time, address-correspondence-controller 109 deletes the entry from the address-correspondence-control-table (step 811).

Finally, the virtual device returns to the standby status if other connections to be dealt with do not exist.

In this first embodiment, the access from the IP network to the HAVi device is demonstrated; however, the access in the reverse order can be done in the same manner.

The GW apparatus in accordance with the first exemplary embodiment allows the IP devices and HAVi devices to communicate with each other.

### Exemplary Embodiment 2

The second exemplary embodiment of the present invention is demonstrated with reference to Fig. 9 - Fig. 13.

In GW apparatus 903 shown in Fig. 9, IP plug-in detector 909 obtains plug-in information of IP devices supplied from IP directory 915, and requests virtual device controller 907 to start an operation described below. Controller 907 has the following additional function to controller 107 described in the first embodiment.

The operation requested to controller 907 is this: Upon receiving a notice from detector 909, the virtual device requests HAVi registry registering means 914 to register a newly added IP device to HAVi registry 913 so that the newly added IP device can be recognized from the HAVi network.

HAVi registry 913 supplies device-directory within the HAVi network corresponding to the registry in the HAVi specification. Registry 913 also realizes a search with an HAVi address (SEID) and the information attributive to devices such as a type of devices, a maker, available functions, a nickname by a user. For instance, search the HAVi registry for a digital TV and the SEID of the digital TV hooked up to the HAVi network. The communication can be then started with this SEID.



IP directory 915 supplies interface information on the IP network for searching services and for utilizing the services.

The IP directory is not always controlled by one specific device intensively, but it may be controlled in the following manner.

5           1. Each device broadcasts its own plug-in information within the network.

          2. When a device is searched, the device corresponding to the plug-in information replies.

Other elements including HAVi device 901, HAVi network 902, GW  
10 apparatus 903, IP network 904, IP device 905, address-correspondence-controller 906, psseudo-address-generator 908, HAVi message input/output means 910, virtual device 911 and IP network 912 function in the same manner as those in the first embodiment.

Fig. 13 shows a service-correspondence-table which stores the  
15 correspondence between identifiers of HAVi network and IP network, where the service includes a printer and other devices.

An operation of GW apparatus 903 is demonstrated based on the flowcharts shown in Figs. 10 and 11 with reference to Fig. 9, Fig. 12 and Fig. 13. First, an operation of IP plug-in detector is demonstrated hereinafter with  
20 reference to Fig. 10.

IP plug-in detector 909 requests IP directory 915 — functioning as a directory server for searching services on the IP side — to notify an event about plug-in and plug-out of an IP device (step 1001). Necessity of requesting a notice depends on he specification of Plug-and-Play.

25           After the request, detector 909 turns to standby status waiting for a notice (step 1002).

IP device 905 requests IP directory 915 to plug-in using a protocol for

plug-in the IP directory, and registers necessary data such as device data, interface data and a service identification.

IP directory 915 determines whether or not the notified content meets the IP device 905, and notifies detector 909 of the plug-in event when directory 915  
5 determines the event notice is necessary (step 1003).

In this second embodiment, a network printer is taken as an example and is plugged in IP network 904.

IP plug-in detector 909 analyzes the notice and determines the content (step 1003).

10 When the notice introduces a plug-in of a new service, detector 909 detects that the network printer has been plugged-in according to information additional to the event notice (step 1004).

Further, detector 909 requests virtual device controller 907 to prepare a virtual device which is supposed to provide a plugged-in device with a GW  
15 process (step 1005).

In this second embodiment, information about a type of a plugged-in device is obtained from additional information to the event notice; however, the HAVi devices can request for searching a registry, thereby triggering the IP side to search the registry for the directory information.

20 An operation of controller 907 when a new IP device is plugged in is demonstrated with reference to Fig. 11(a).

Upon receiving a request from detector 909, virtual device controller 907 inquires of IP directory 915 to obtain the interface information of the plugged-in device (step 1101).

25 The interface information can be obtained when a HAVi device searches for IP devices, or when the HAVi device receives a connection request via the GW apparatus.

The interface information includes device-dependent-information for controlling the device, i.e. the information written by script languages such as Hyper Text Makeup Language (HTML), Extensible Makeup Language (XML), or JAVAScript (Java and JavaScript are trademarks of Sun Microsystems, Inc.),  
 5 programs supplying a user interface, and application programming interface (API) of device-control-method.

Virtual device controller 907 prepares virtual device 911 appropriate as GW based on the device information obtained as discussed above (step 1102).

The virtual device can be also prepared in this way: If a standard is  
 10 available for inter-operations of HAVi devices and the like in different Plug-and-Play specifications, the virtual devices according to this standard for the inter-operations could be prepared, and then appropriate devices could be selected responsive to a type of devices.

For instance, when a network printer is plugged in the IP side, a virtual  
 15 device of network printer according to the inter-operation standard is selected. This inter-operations standard allows the network printer according to Jini spec. (Jini is the trademark of Sun Microsystems, Inc.) to be manipulated from the HAVi side.

Controller 907 obtains the HAVi address of the virtual device, i.e. SEID  
 20 and HAVi Unique ID (HUID), using pseudo-address-generator 906 (step 1103). This is the same step as the one in the first embodiment.

The HAVi address obtained, i.e. SEID and HUID, are registered together with additional data of the devices to HAVi registry 913 (step 1104).

The HUID functions as an identifier of an eternal Software Element  
 25 being not subjected to the influence from a network reset.

Next, HAVi registry 913 broadcasts a NewSoftwareElement global event which notifies the HAVi network of a newly plugged-in virtual HAVi device.

This broadcasting saves the HAVi network a process of obtaining an IP address for manipulating a newly plugged-in IP devices.

Virtual device controller 907 registers a set of the HAVi address already supplied and ID information on the IP side to the address-correspondence-table  
 5 via address-correspondence-controller 906 described in the first embodiment, then turns the virtual device to the standby status (step 1105).

Fig. 12 shows an address-correspondence-table. In this table, the virtual device functions as a GW of the network printer on the IP network, and the SEID viewed from the HAVi side is 10 — 5, and that viewed from the IP side is  
 10 192.0.0.1. Further, as shown in Fig. 13, this table controls the correspondence between identifiers of services (the network printer in this embodiment) on the internet and identifiers viewed from the HAVi side. The service identifiers on the internet are uniquely controlled by the directory service. For instance, the service ID of Jini is the case.

15 Upon receiving a command from the HAVi device, e.g. an output from an image printer, the virtual device converts the command and then sends the converted command to the IP network via IP network input/output means.

An operation at plugging-out an IP device is demonstrated with reference to the flowcharts shown in Figs. 10 and 11.

20 When the event notice on step 1003 indicates a service-out, detector 909 requests controller 907 to carry out the service-out.

As illustrated in the flowchart in Fig. 11, the virtual device controller searches the service-correspondence-table shown in Fig. 13 (step 1109). Then the controller determines whether or not the service-out is still plugged-in (step  
 25 1110), and when the service is still plugged-in, the controller deletes the entry from the address-correspondence-table (step 1111). The controller also deletes the entry of HAVi registry 913 (step 1112), and stops the virtual device (step

1113). Then the controller broadcasts the GoneSoftwareElement global event which notifies the HAVi network of going out of SoftwareElement, thereby notifying the HAVi network of going out of the IP device (step 1114).

When the IP service is gone out ( a device is removed from the network in this embodiment) through these steps, GW apparatus 903 follows this result and is deleted from the HAVi registry, thereby avoiding a mismatch.

The GW apparatus in accordance with the second embodiment as discussed above allows the HAVi devices to detect a device newly plugged-in the IP network as well as to obtain the interface information via the HAVi registry.

### Exemplary Embodiment 3

A gateway (GW) apparatus of the present invention in accordance with another exemplary embodiment is demonstrated with reference to Figs. 12 – 16.

Fig. 14 is a block diagram illustrating functions of the GW apparatus. HAVi plug-in detector 1406 monitors plug-in events being broadcast to the HAVi network, and obtains plug-in information of HAVi devices, then requests virtual device controller 1407 to start the operation described below. Controller 1407 has the following additional function to controller 907 described in the second embodiment. The operation requested to controller 1407 is this: Virtual device controller 1407 requests HAVi registry registering means 1414 to register a newly added HAVi device to IP registry 1415 so that the newly added HAVi device can be recognized from the IP network. IP directory 1415 and HAVi directory 1413 function as same as those do in the second embodiment. Other elements including HAVi device 1401, HAVi network 1402, GW apparatus 1403, IP network 1404, IP device 1405, address-correspondence-controller 1409, psseudo-address-generator 1408, HAVi message input/output means 1410, virtual device 1411 and IP network 1412 function in the same manner as those

in the first embodiment.

Based on the flowcharts shown in Figs. 15 and 16, an operation of the GW apparatus of the present invention is demonstrated with reference to Fig. 14, Fig. 12 and Fig. 13.

5 First, an operation of HAVi plug-in detector 1406 is demonstrated with reference to Fig. 15.

Detector 1406 requests an event controller of HAVi middle wear to monitor and notify an event to be broadcast to the HAVi network (step 1501).

10 In the HAVi specification, if an event is registered to EventManager of HAVi System Software Element which controls an input/output of HAVi events, the HAVi middle wear monitors a message travelling through the network, and notifies the SoftwareElement (the HAVi plug-in detector in this embodiment) of the target event when it is broadcast.

15 After the request, detector 1406 is turned to a standby status waiting for a notice (step 1502).

Upon being plugged-in, HAVi device 1401 registers its own information to "Registry"—a database of directory information of a device to be a host—as specified in the HAVi specification. The Registry broadcasts an event (NewSoftwareElement global event) all over the network to notify a new plug-in.

20 As described previously, detector 1406 obtains the event (NewSoftwareElement event) notifying the new plug-in via the HAVi middle wear (step 1503).

In this embodiment, a video-tape-recorder (VTR) is plugged-in to HAVi network 1402, for instance. Detector 1406 obtains information of a plug-in of the VTR from additional information of the notified event (step 1504).

Detector 1406, further, requests virtual-device-controller 1407 to prepare a virtual device in order to provide the plugged-in device with a GW process

009290" 86980960  
09603698" 062600

(step 1505).

Next, an operation of controller 1407 when an HAVi device is newly plugged-in is demonstrated with reference to Fig. 16.

Upon receiving the request from detector 1406, controller 1407 inquires  
5 HAVi registry 1413 to obtain the information about the plugged-in device such as a type of the device, HUID, a maker and the like. This information is not be always obtained at the same time as the plug-in.

Based on the device information obtained, controller 1407 prepares virtual device 1411 appropriate to the GW (step 1602).

10 The virtual device can be also prepared in this way: If a standard is available for inter-operations of HAVi and Jini, the virtual devices according to this standard for the inter-operations could be prepared, and then appropriate devices could be selected responsive to a type of devices.

For instance, when a VTR is plugged in the HAVi side, a virtual device of  
15 VTR according to the inter-operation standard is selected. This inter-operations standard allows the VTR to be manipulated from the IP side.

Controller 1407 obtains an identifier, e.g. an IP address, a port number of the virtual device using pseudo-address-generator 1408 (step 1603). This is the same step as the one in the first embodiment.

20 Controller 1407 generates interface information using the IP identifier obtained and additional information about the device (step 1604).

The interface information includes device-dependent-information for controlling the device, i.e. the information written by script languages such as Hyper Text Makeup Language (HTML), Extensible Makeup Language (XML),  
25 or JavaScript (Java and JavaScript are trademarks of Sun Microsystems, Inc.), programs including a user interface such as Java applet, and objects including application programming interface (API) of device-control-method.

09603698-062600

Next, virtual-device-controller 1407 registers the interface information previously generated to IP directory 1415 following a protocol specified in respective Plug-and-Play specifications (step 1605).

As a result, the IP network can manipulate a newly plug-in HAVi device without searching for an access identifier or an access method.

Virtual device controller 1407 registers a set of the HAVi address already supplied and ID information on the IP side to the address-correspondence-table via address-correspondence-controller 1406 described in the first embodiment, then turns the virtual device to the standby status (step 1606).

As shown in Fig. 13, controller 1407 controls the correspondence between the identifier of a service on the internet (the VTR in this embodiment) and an identifier to be viewed from the IP side. The VTR's identifier has been obtained on step 1504. The identifier to be viewed from the internet side is specified in the specifications of respective Plug-and-Play.

Upon receiving a command (e.g. Record a program with the VTR.) from an IP device, the virtual device converts the command as same as in the first embodiment, and sends the converted command to the HAVi network via the HAVi network input/output means.

An operation at plugging-out an HAVi device is demonstrated with reference to the flowcharts shown in Figs. 15 and 16.

When the event notice on step 1503 indicates a service-out (GoneSoftwareElement global event in the HAVI specification), HAVI plug-in detector 1406 requests controller 1407 to delete the service. Controller 1407 searches HAVi registry 1413 with a key of HAVi address (SEID)—additional information to the event, thereby obtaining HUIDs of the remained devices. Next, controller 1407 searches the service-correspondence-control-table shown in Fig. 13 (step 1610) following the steps shown in Fig. 16, then determines



whether or not the service-out is still plugged-in (step 1611).

Controller 1407 deletes the entry from the address-correspondence-table and service-correspondence-table via address-correspondence-controller 1409 (step 1612 and step 1613).

5       Controller 1407 also notifies IP directory 1415 of the service-out (step 1614), then stops the virtual device (step 1615).

When the HAVi service is out (a device is removed from the network in this embodiment) through these steps, the service is deleted also from the IP directory, so that the service-out can be recognized from the IP network.

10       The GW apparatus in accordance with the third embodiment as discussed above allows the IP devices to detect a device newly plugged-in the HAVi network as well as to obtain the interface information via the IP registry.

#### Exemplary Embodiment 4

15       A gateway (GW) apparatus in accordance with the fourth embodiment is demonstrated hereinafter with reference to Fig. 17 through Fig. 20.

Fig. 17 is a block diagram illustrating functions of the GW apparatus.

HAVi stream controller 1716 allows HAVi devices in compliance with the HAVi spec. to carry out a stream-transfer among the devices. Virtual device  
20   1711 has additional functions to those described in the first embodiment, i.e. (1) establishing a connection to the IP devices, and (2) keeps a band when necessary. Stream-port-correspondence-controller 1717 controls the correspondence between HAVi Functional Component Module Plug (FCM Plug)—a control unit of stream in compliance with the HAVi spec. on the GW apparatus—and IP  
25   stream ports. Stream-packet-converter 1718 converts HAVi-stream-packet to IP-stream-packet and vice versa, then sends out them. Other elements function as same as those described in the first through third embodiments.

Fig. 18 illustrates a sequence of producing a stream connection between the HAVi device and the IP device via the GW apparatus.

Fig. 19 illustrates a sequence of cutting the stream produced through the sequence shown in Fig. 18.

5 In Fig. 20, stream-port-correspondence-table 2001 – indicating the correspondence between the stream ports—includes, e.g. an ID 2002 of HAVi FCM (HAVi Unique ID) which can handle the stream, FCM flag No. 2003 of HAVi stream includes Plug control Register (PCR) NO. 2004 specified by IEC 61833 and IP port No. 2005 for producing a stream connection on the IP side.

10 Based on the sequence shown in Fig. 18, a process of producing the stream connection between the HAVi device and IP device is described with reference to Fig. 17 and Fig. 20.

When IP device 1705 capable of receiving videos is plugged-in, the device is registered in HAVi registry 1713 of GW apparatus 1703 together with in IP directory 1715. At this moment, the GW apparatus collects and stores the following device-information:

- (1) Is this device capable of handling a stream?
- (2) What kind of data-rate does this device handle?

20 Next, based on the sequence shown in Fig. 18, the process that the HAVi device sends a stream to the plugged-in IP device is demonstrated with reference to Fig. 17 and Fig. 20.

HAVi device 1701 searches the HAVi registry for video-receivable devices (step 1801).

25 Since IP device 1705 has been registered as a video-receivable device, GW apparatus 1703 returns the SEID—the HAVi address of virtual device 1711—to the HAVi device (step 1802).

The HAVi device starts a negotiation for producing a stream following the

009290" 869E0960

steps specified by the HAVi spec. The HAVi spec. specifies to make the following inquiries as a pre-process to the producing of stream connection (step 1803):

(1) status of using plugs;

5 (2) What kind of stream types can the device handle?

The virtual device of GW apparatus 1703 in this embodiment acts for the IP device, therefore, the virtual device inquiries an actual status of the network and holds the band necessary for transmission between the GW apparatus and the IP device (step 1804).

10 Next, the virtual device detects a physically vacant plug in the GW apparatus per se, and registers it in a plug-control-table using stream-port-controller 1717 (step 1805).

In the plug-control-table, following items are recorded as shwon In Fig. 20: HUID of the virtual device, FCM plug No. which is used as an identifier for stream transmittance/receipt used in a protocol, a physical Plug Control Register's (PCR) No. specified by IEC 61883, and a port No. used on the IP side.

15 After these processes, the GW apparatus replies to the HAVi device inquiring about the stream production via HAVi-stream-controller 1716 (step 1806).

20 When the stream is ready for transmission, the HAVi device instructs the HAVi middle wear to transmit the stream. At this time, an event notice (ConnectionAdded global event) of the stream transmission is sent out (step 1807).

25 When the stream arrives at the GW apparatus, an IEC 61883 packet is converted to an IP packet for transmitting thereof to the IP device. For instance, a DV format is converted to MPEG appropriate data-format on the IP if necessary. The GW apparatus sends the converted stream to the IP device.

0092290" 8693E0960

In this embodiment, the stream-transfer from the HAVi device to the IP device is described. The transfer on the other way around can be achieved in the same manner.

Based on the sequence shown in Fig. 19, an operation of cutting the stream-connection is demonstrated with reference to Fig. 17 and Fig. 20.

When the HAVi device issues an instruction of cutting the stream, the HAVi middle wear sends an event notice (Connection Dropped) of stream-stop to the HAVi network. Stream controller 1716 of GW apparatus 1703 detects this event and searches HUID of the source of additional information to the event for the plug-control-table shown in Fig. 20 to find the connection cut (step 1902).

The GW apparatus specifies the IP connection to be cut from the table, and carries out the cut-process (step 1903).

The entry having been cut out is detected from the plug-control-table (step 1904).

In this embodiment, the cut process of the stream-connection carried out by the HAVi device is described. The cut process by the IP device can be done in the same manner.

The GW apparatus of the present invention realizes the stream-transfer between the HAVi device and IP device.

#### (Exemplary Embodiment 5)

A gateway (GW) apparatus in accordance with the fifth exemplary embodiment is demonstrated with reference to Fig. Fig. 21 – Fig. 26.

Fig. 21 is a block diagram illustrating functions of the GW apparatus.

Data Driven Interaction (DDI) data acquirer 2116 carries out a communication using an HAVi device supplying DDI function, and DDI protocol, so that acquirer 2116 collects and stores information necessary for forming a

GUI which manipulates the HAVi device. User interface (UI) generator 2117 converts the DDI information to the GUI format (such as HTML, Java applet) which is used in general on the internet. UI generator 2117 has information of correspondence between DDI Element – elements of HAVi GUI – and components (Java Abstract Window Toolkit (AWT)) of GUI used in general on the internet. UI provider 2118 accepts a request of a communication application (WWW browser, etc.) from client-IP-device 2105 on the internet, and transmits the converted GUI to client-IP-device 2105. Virtual device 2111 has the following additional functions to those described in the first embodiment:

10 Device 2111 accepts a request from IP device 2105 via the GUI, and communicates to the HAVi device with the DDI protocol. In other words, Device 2111 functions as DDI controller in the HAVi spec. Other elements operate as same as those described in the first, second and third embodiments.

Fig. 22 shows a sequence illustrating an operational flow of the GW apparatus acquiring the DDI information of the HAVi device after the HAVi device is plugged-in.

Fig.23 shows a sequence illustrating an operational flow where a client device on the internet makes a request for the HAVi device via the GW apparatus using GUI definition information produced by the GW apparatus.

Fig. 24 shows a GUI produced by using the DDI information. Fig. 25 shows a part of DDI information collected by acquirer 2116. Fig. 26 shows a part of source code used in producing the GUI by using the DDI information shown in Fig. 25, the GUI being employed on the internet.

The flow from acquiring the DDI information to generating the GUI for the IP is described with reference to the sequence shown in Fig. 22.

When HAVi device 2101 is plugged-in HAVi network 2102, plug-in detector 2106 detects the event (step 2201), then GW apparatus 2103 searches

009290" 869E0960  
00603698 062600

In the device information, an attributive value (GUI\_Requirement) reserved in the HAVi spec, i.e. whether or not supporting DDI, is registered.

Next, based on the DDI information stored, UI converter 2117 produces definition information of GUI utilizing the knowledge corresponding to components of the GUI on the IP side (step 2205).

Fig. 23 shows a flow of operations how a client-IP-device manipulates an HAVi device via the GW apparatus.

First client-IP-device 2105 sends a request of acquiring a GUI from a

In the GW apparatus, UI provider 2118 receives this request and starts a communication session with a target HAVi device using a DDI protocol (step 2302), and transfers the GUI produced (step 2303).

Based on this information, virtual device 2111 sends a User Action method of the DDI protocol to the target HAVi device with the DDI protocol (step 2306).

The server interprets this reply and, if necessary, transfers it to IP device 2105. After this, every time IP device 2105 is manipulated by the GUI, the process from step 2304 to step 2307 is repeated.

When the client notifies the end of manipulation (step 2311), virtual device 2111 issues "UNSubscribe () method" of DDI protocol to the target HAVi device, then closes the manipulation session (step 2312).

The GW apparatus in accordance with this fifth embodiment allows an IP





The process discussed above is the same as that in the third embodiment.

When the virtual device exists in site 2717 and the version does not need a version-up, the process onward is the same as that described in the third embodiment (step 2906).

Based on this provider's information, downloader 2716 downloads the virtual device into site 2717 via IP network input/output means 2712 (step 2908).

The GW apparatus in accordance with the sixth embodiment keeps functioning as a GW by acquiring necessary information from the network when the information held by the GW apparatus cannot allow the GW apparatus to function as a GW.

In conclusion, the gateway (GW) apparatus and the method of the present invention realizes the following functions:

1. The GW apparatus and the method realize communications between IP devices and HAVi devices.

5        2. The GW apparatus and the method allow a HAVi device to detect a device plugged in the IP network and acquire the interface information.

3. The GW apparatus and the method allow an IP device to detect a device plugged in the HAVi network and acquire the interface information.

10       4. The GW apparatus and the method realize a stream transfer between HAVi devices and IP devices.

5. The GW apparatus and the method allow an IP device to display UI for manipulating an HAVi device.

15       6. The GW apparatus and the method can maintain functioning as a gateway by acquiring necessary information from the network when the information locally held by the GW apparatus is not enough for itself to function as the gateway.

009290" 8692960

What is claimed is:

1. A gateway (GW) apparatus for communicating between networks, said GW apparatus comprising:

(a) first message input/output means for sending and  
5 receiving a message to/from a first network;

(b) second message input/output means for communicating a second network based on an internet protocol (IP);

(c) a first plug-in detector for detecting a plug-in of a first device to the first network;

10 (d) a virtual device functioning a gateway for the first device plugged in the first network and a second device plugged in a second network to communicate with each other;

(e) a virtual-device-controller for providing said virtual device corresponding to the first device plugged-in with an IP identifier, for the  
15 second network accessing to said virtual device, responsive to information supplied from said first plug-in detector;

(f) a pseudo-address generator for generating a pseudo address for said virtual device to communicate with the first device in the first network upon receiving a connection request from the second device in the  
20 second network, and for outputting the pseudo address to said virtual-device-controller; and

(g) an address-correspondence-controller for controlling correspondence between the IP identifier and the pseudo address provided to said virtual device by said virtual-device-controller.

25

2. The GW apparatus as defined in Claim 1 further comprising:

(h) a second plug-in detector for detecting a plug-in of the

009290" 869E0960

second device by monitoring "a directory supplying information about the second device in the second network"; and

(i) a registry register for registering in a registry in the first network,

5            wherein said controller further acquires the information about the second device from the directory, and establishes a virtual device corresponding to the second device based on the information acquired,

          wherein said GW apparatus allows the first device to detect the second device plugged-in the second network and acquires interface information  
10        via the registry.

3. The GW apparatus as defined in Claim 1 further comprising:

(j) a directory register for registering information about the first device plugged-in to the directory of the second network,

15            wherein said first plug-in detector detects the plug-in of the first device by monitoring an event in the first network,

          wherein said virtual-device-controller acquires information about the first device plugged-in the first network from a registry on the first network, and has said virtual device include a virtual device corresponding to  
20        the first device plugged-in based on the information acquired;

          wherein said GW apparatus allows the second device to detect the first device plugged-in the first network via a registry on the second network.

25            4. The GW apparatus as defined in Claim 3 further comprising:

(k) a stream controller for controlling a stream transfer between the first devices on the first network;

009290" 869E0960

(l) a stream-port-correspondence-controller for controlling correspondence between a stream input/output identifier on the first network and a stream port on the second network;

(m) a stream packet converter for converting a stream packet on the first network to a stream packet on the second network and vice versa, and sends/receives thereof,

wherein said virtual device establishes a stream connection to the second device plugged-in the second network, and has a stream generator for holding a band when necessary,

wherein said GW apparatus transfers a stream between a device on the first network and a device on the second network.

5. The GW apparatus as defined in Claim 3 further comprising:

(o) an information acquirer for acquiring information necessary for forming a user interface;

(p) a user interface (UI) generator for generating a UI to be used on the second network based on the information acquired; and

(q) a UI provider for transferring the UI generated when the second device requests to access to the first network,

wherein said controller detects a plug-in of a device to the first network, and determines whether or not the device plugged-in supports a protocol on the first network, and when said controller determines the protocol is supported, said information acquirer acquires necessary information for forming the UI by communicating with the device,

wherein said GW apparatus allows the second device on the second network to display the UI for manipulating the first device on the first network.

6. The GW apparatus as defined in Claim 1 further comprising:

(r) a registry of the first network;

(s) a downloader for downloading necessary information to  
5 said virtual device by accessing to an information-provider-site providing  
information about said virtual device;

wherein said virtual-device-controller detects a plug-in of the  
first device, searches the registry for information about the first device plugged-  
in, and acquires the information,

10 wherein said controller further includes an information  
acquirer for acquiring the information from the provider site based on the device  
information acquired from the registry when said controller determines one of  
two cases; (i) other cases than a case where said virtual device includes a virtual  
device corresponding to one of the first device plugged-in and the second device  
15 plugged-in, and (ii) a case where said controller determines that said virtual  
device needs to update a software version thereof.

7. The GW apparatus as defined in Claim 1 wherein said virtual  
device includes:

20 (d-1) a connection controller for controlling a correspondence  
between the first device and the second device;

(d-2) a command converter for converting a first command  
issued from the first network into a second command issued from the second  
network and vice versa;

25 (d-3) a command-correspondence-controller for controlling a  
correspondence between the first and the second commands; and

(d-4) an address converter for transferring a first message

0092290" 86922900

issued from the first network to the second network and vice versa.

8. A method of gateway for communicating between a first device plugged-in a first network and a second device plugged-in a second network by using a virtual device; said method comprising:

(a) transmitting and receiving a message to/from the first network;

(b) communicating with the second network following an internet protocol (IP);

(c) acquiring information about the first device by detecting a plug-in of the first device in the first network;

(d) providing an IP identifier to the virtual device corresponding to the first device plugged-in responsive to the information acquired in step (c) for accessing to the virtual device from the second network;

(e) upon receiving a connection request from the second device, the virtual device generates a pseudo address for communicating with the first device plugged-in; and

(f) communicating between the first network and the second network responsive to the correspondence between the pseudo address provided to the virtual device and the IP identifier.

9. The method of gateway as defined in Claim 8 further comprising:

(g) detecting a plug-in of the second device by monitoring a directory which provides information about the second device in the second network;

(h) providing the virtual device with an address, and

009290" 86930960

registering the address to a registry of the first network,

wherein said step (d) further comprising:

(d-1) acquiring information about the second device from the directory, and setting the virtual device corresponding to the second device  
5 based on the information acquired; and

(d-2) detecting the second device plugged-in the second network from the first device via the registry, and acquiring interface information.

10 10. The method of gateway as defined in Claim 8 further comprising:

(i) detecting the plug-in of the first device by monitoring an event in the first network,

(j) registering the information about the first device to a directory which provides information about the second device in the second  
15 network;

wherein said step (d) further comprising:

acquiring the information about the first device plugged-in the first network from a registry of the first network, so that the virtual device includes a virtual device corresponding to the first device;

20 detecting the first device plugged-in from the second device via the directory, and acquiring interface information.

11. The method of gateway as defined in Claim 8 further comprising:

(k) carrying out a stream transfer between the first devices of  
25 the first network;

(l) storing a correspondence between an identifier of stream input/output plug of the first network and a stream port of the second network;

009290" 8692960



(m) converting a stream packet of the first network to/from a stream packet of the second network, and transmitting/receiving the packet converted; and

(n) establishing a stream connection to the second device  
5 plugged-in the second network, and holding a band when necessary,

wherein said method carries out the stream transfer between the first network and the second network.

12. The method of gateway as defined in Claim 10 further  
10 comprising:

(o) acquiring information necessary for forming a user interface;

(p) generating the user interface to be used in the second network using the information acquired; and

15 (q) transferring the user interface upon a request of accessing to the first device from the second device,

wherein said step (d) further comprising:

detecting the plug-in of the first device;

20 determining whether or not the first device plugged-in supports a protocol of the first network for providing the user interface; and

when determining the first device supports the protocol, acquiring information necessary for forming the user interface by communicating with the first device,

25 wherein said method allows the second device to display the user interface for manipulating the first device.

13. The method of gateway as defined in Claim 8 further comprising:

00503698 062500  
005290 8692960

(r) accessing to an information provider site which provides information about the virtual device, and downloading the information to the virtual device,

wherein said step (d) further comprising:

5                   detecting the plug-in of the first device, searching a registry of the first network, and acquiring the information about the first device,

wherein said step (e) further includes:

10                   acquiring information from a provider site based on the device information acquired from the registry when one of two cases is determined; (i) other cases than a case where the virtual device includes another virtual device corresponding to one of the first device plugged-in and the second device plugged-in, and (ii) a case where the virtual device needs to update a software version thereof.

15

14. The method of gateway as defined in Claim 8, wherein said step (d) further comprising:

storing a connection between the first and second devices into the virtual device;

20

converting a first command issued from the first network into a second command, and the second command issued from the second network into the first command so that both the commands can be executed by either one of the first and second network;

25                   storing a correspondence between the first and the second commands into the virtual device; and

transferring the message issued from the first network and the second network between the first and the second networks by the virtual

009290" 869E0960

device following the connection stored as well as the command stored.

009290" 869E0960

### Abstract

A gateway realizes a connection between a network where HAVi devices are hooked up and another network in accordance with a Play-and-Plug spec. (e.g. the internet protocol (IP)) other than the HAVi spec. An HAVi plug-in  
5 detector detects a plug-in of a device to the HAVi network. A virtual device functions as a gateway for accessing from a device plugged-in the IP network to the device plugged-in the HAVi network. A virtual device controller provides the virtual device with an IP identifier for accessing to the virtual device from the IP network, and turns the virtual device to a standby status waiting for  
10 connection. A pseudo address generator generates a pseudo address for the virtual device to communicate with the device in the HAVi network, and provides the virtual device with the pseudo address. An address-correspondence-controller controls the correspondence between an HAVi address and the IP identifier both provided to the virtual device.

FIG. 1

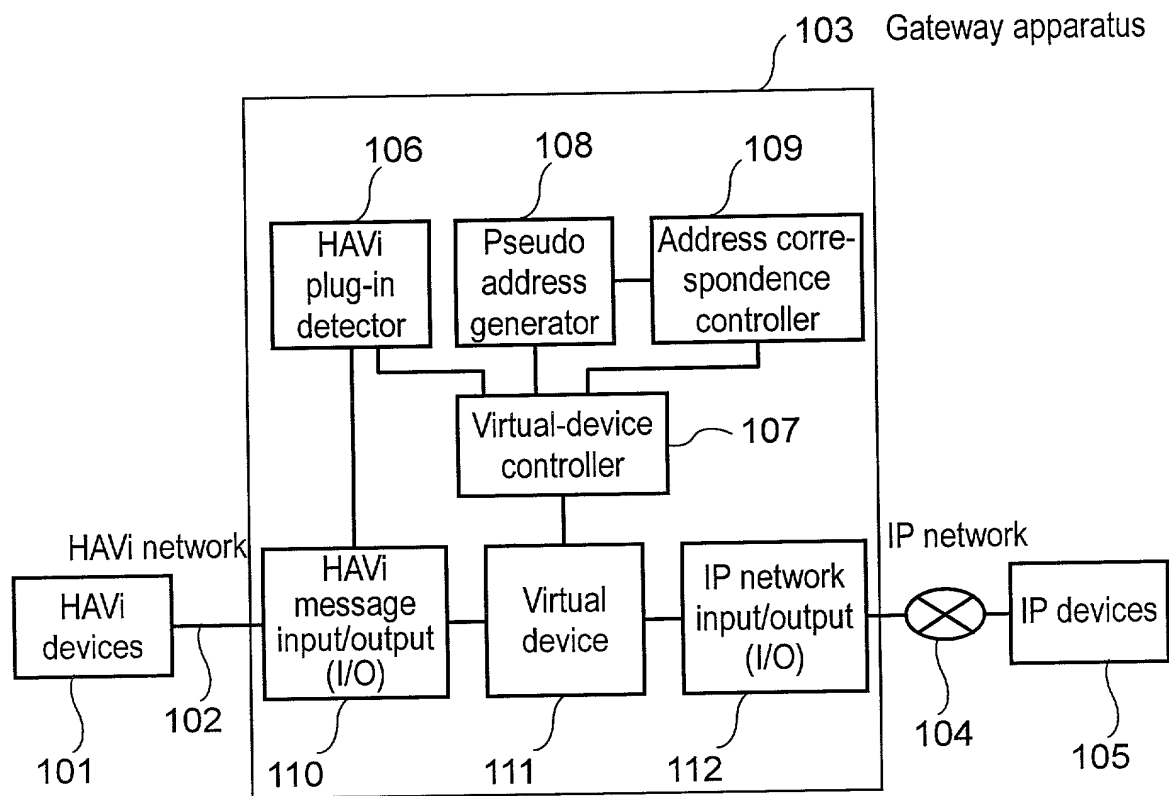


FIG. 2

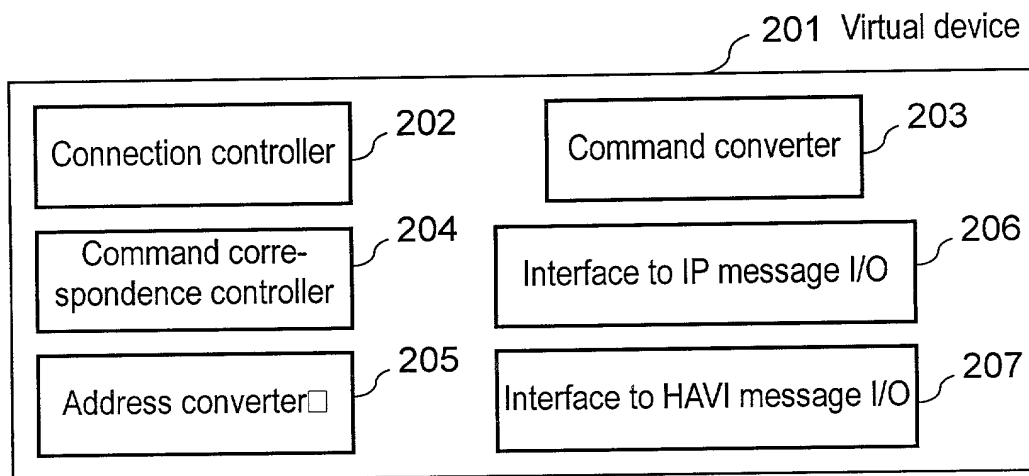



FIG. 3



00000000000000000000000000000000

009290" 869E0960

FIG. 4

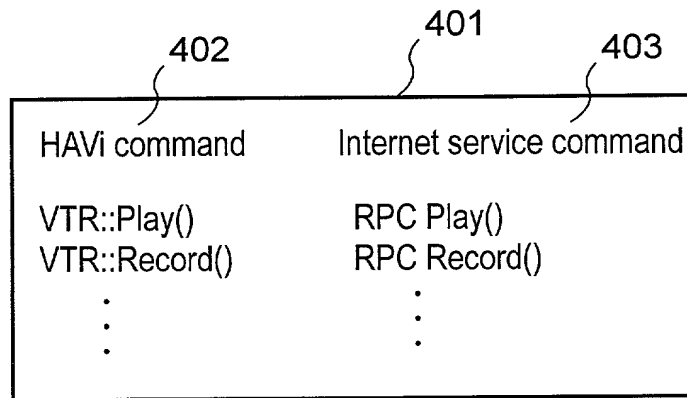


FIG. 5

502	503	501	504
Connection	HAVi-side address		Internet-side address
Virtual VTR-IP client 1	10-2		192. 0. 0 1:8080
Virtual VTR-IP client 2	10-3		192. 0. 0 1:8080
Virtual DTV-IP client 3	10-4		192. 0. 0 1:8081

FIG. 6

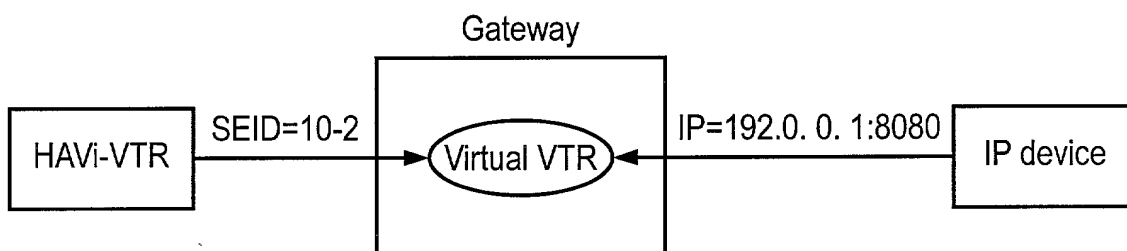


FIG. 7

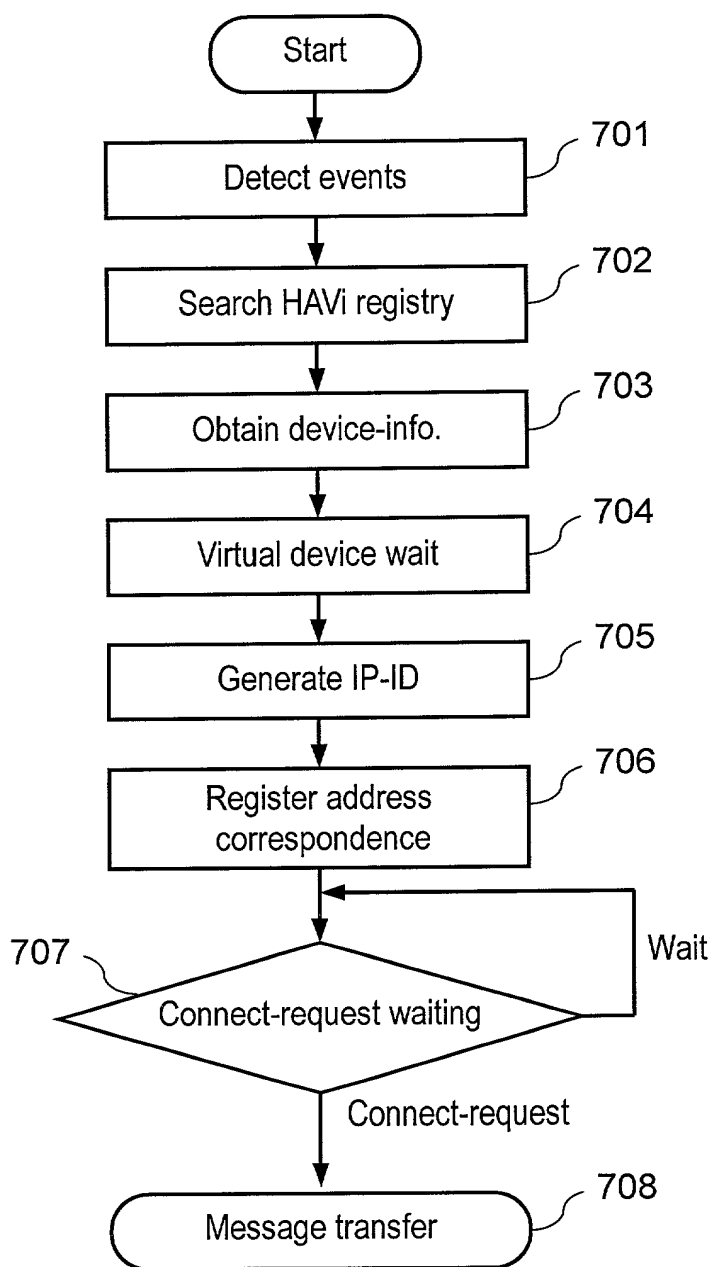




FIG. 8

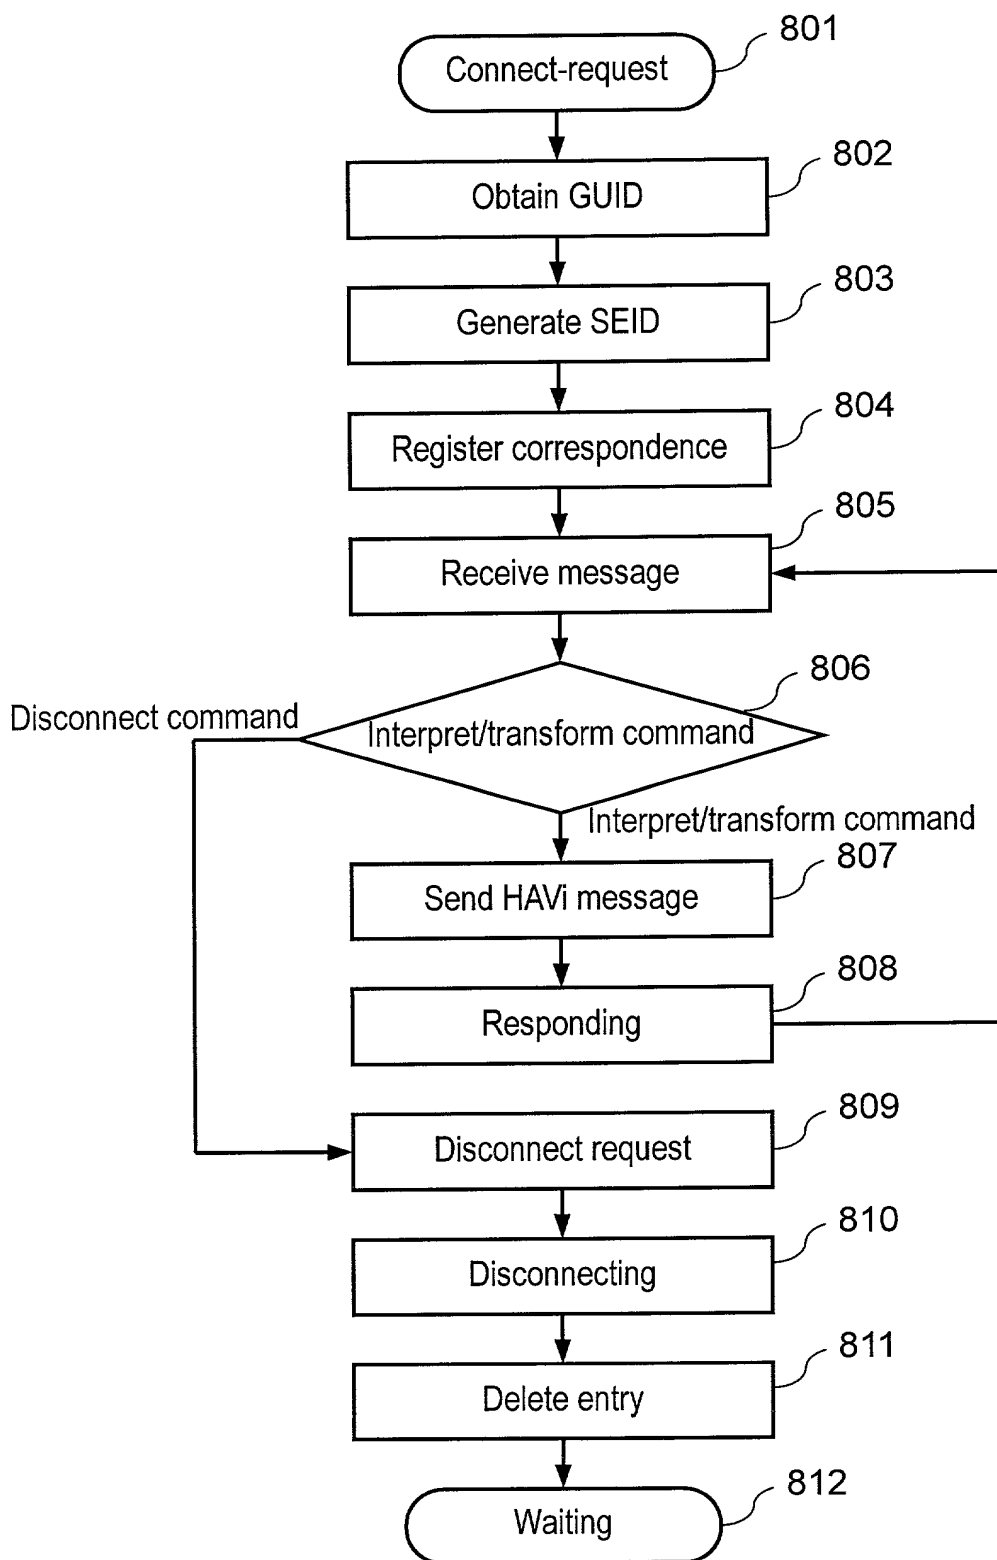


FIG. 9

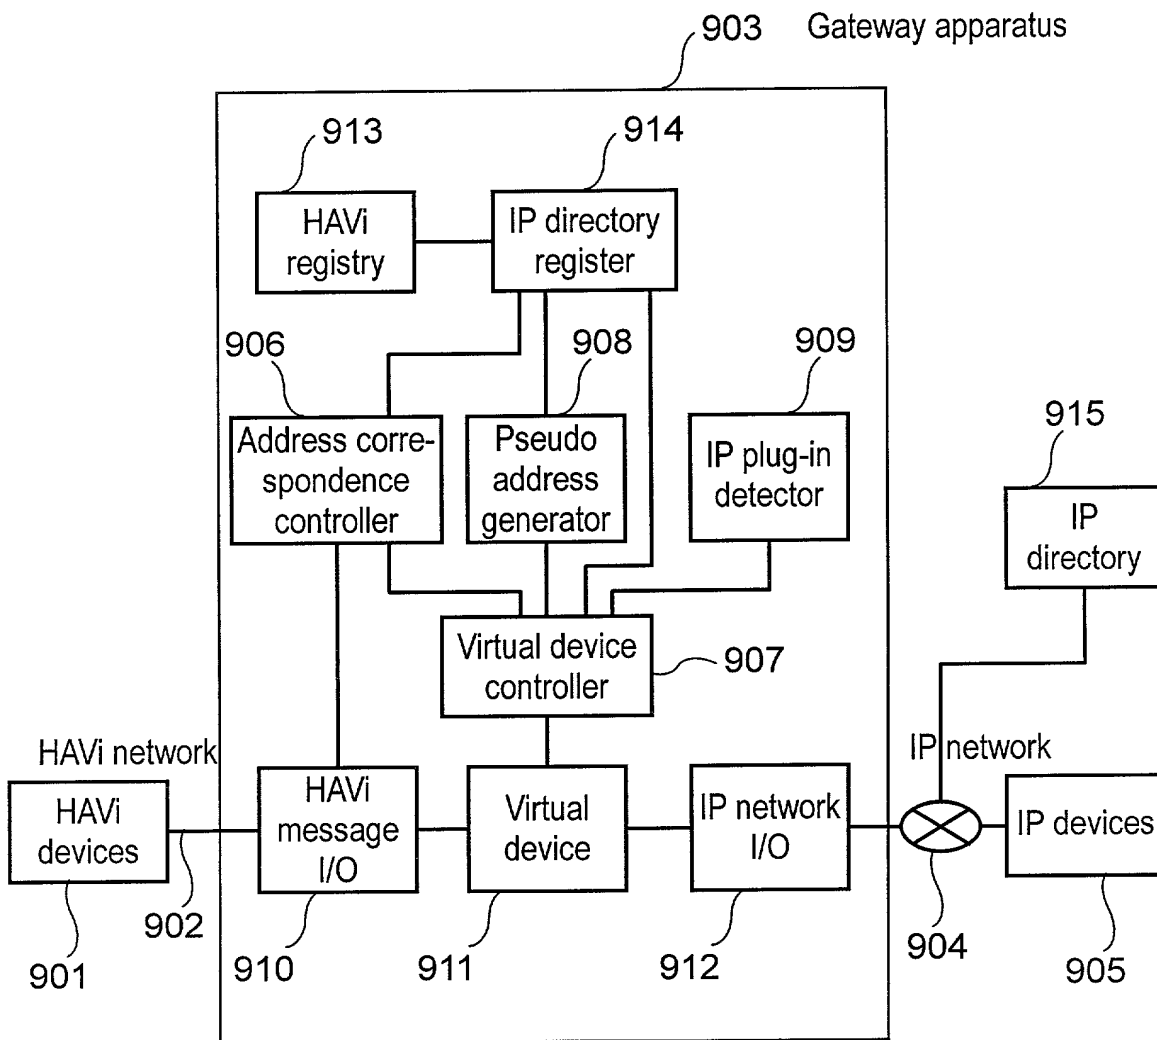


FIG. 10

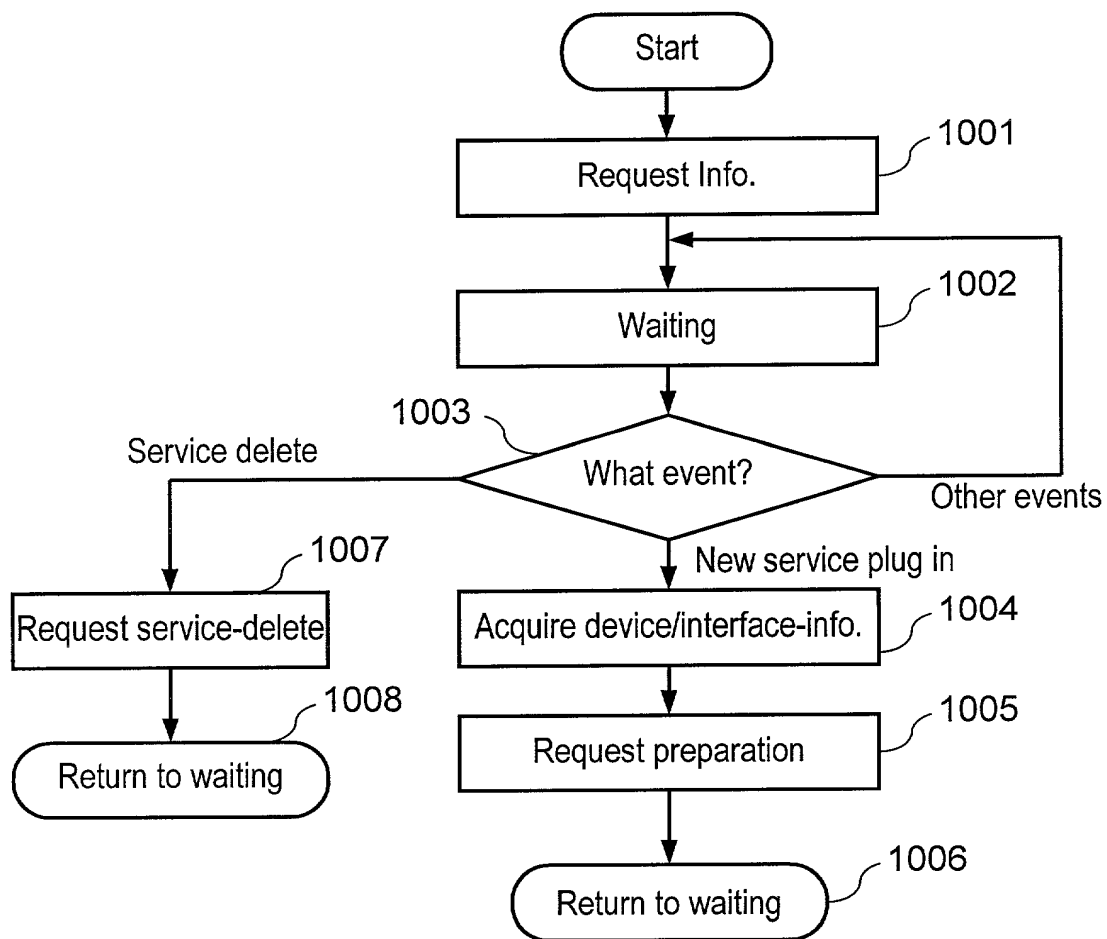


FIG. 11A

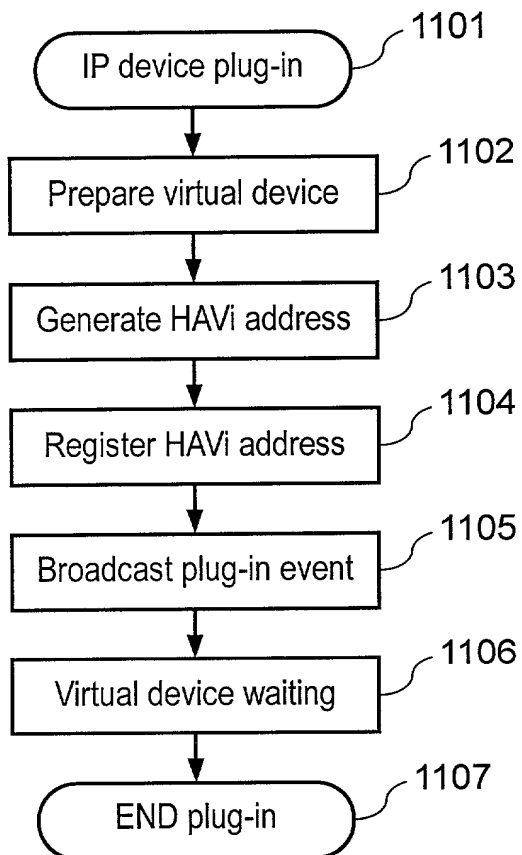


FIG. 11B

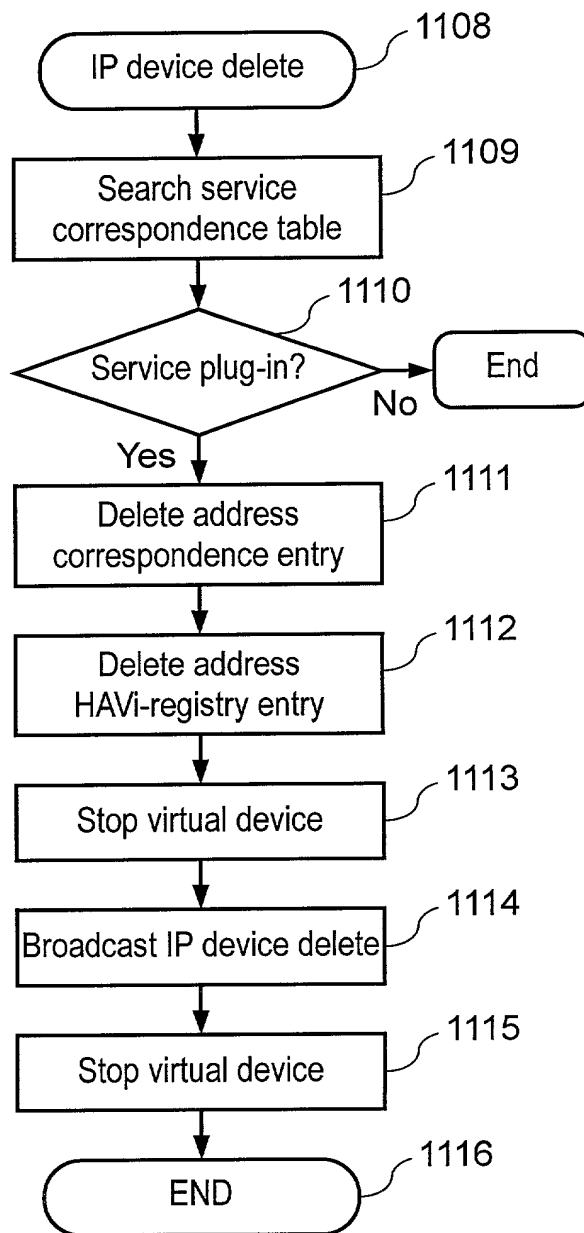


FIG. 12

Connection	HAVi-side address	Internet-side address
HAVi client-Virtual printer	10-5	192. 0. 0 1

FIG. 13

Service	HAVi HUID	Internet service ID
IP network printer	10-5	12E83420A

FIG. 14

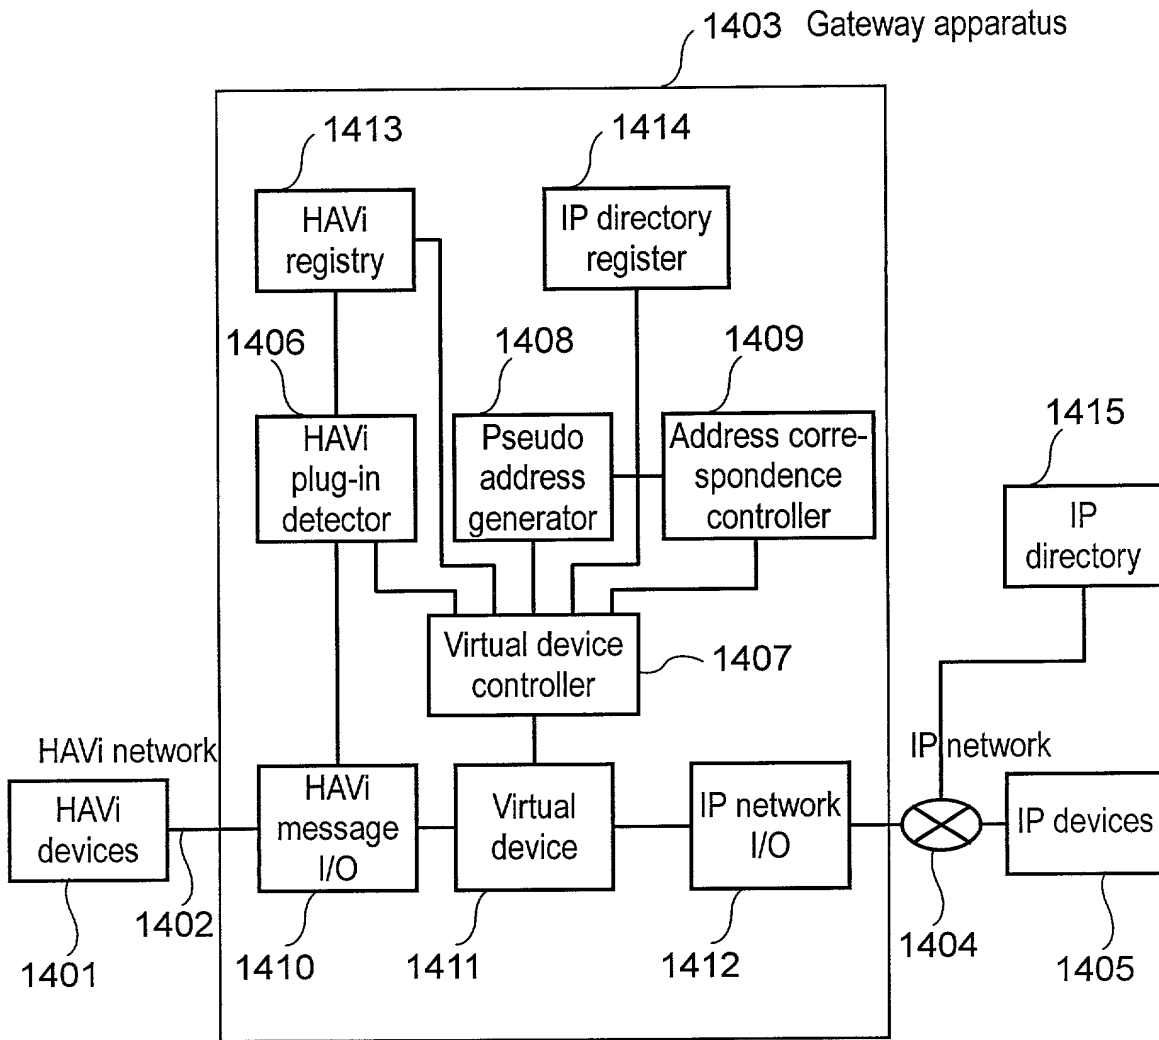


FIG. 15

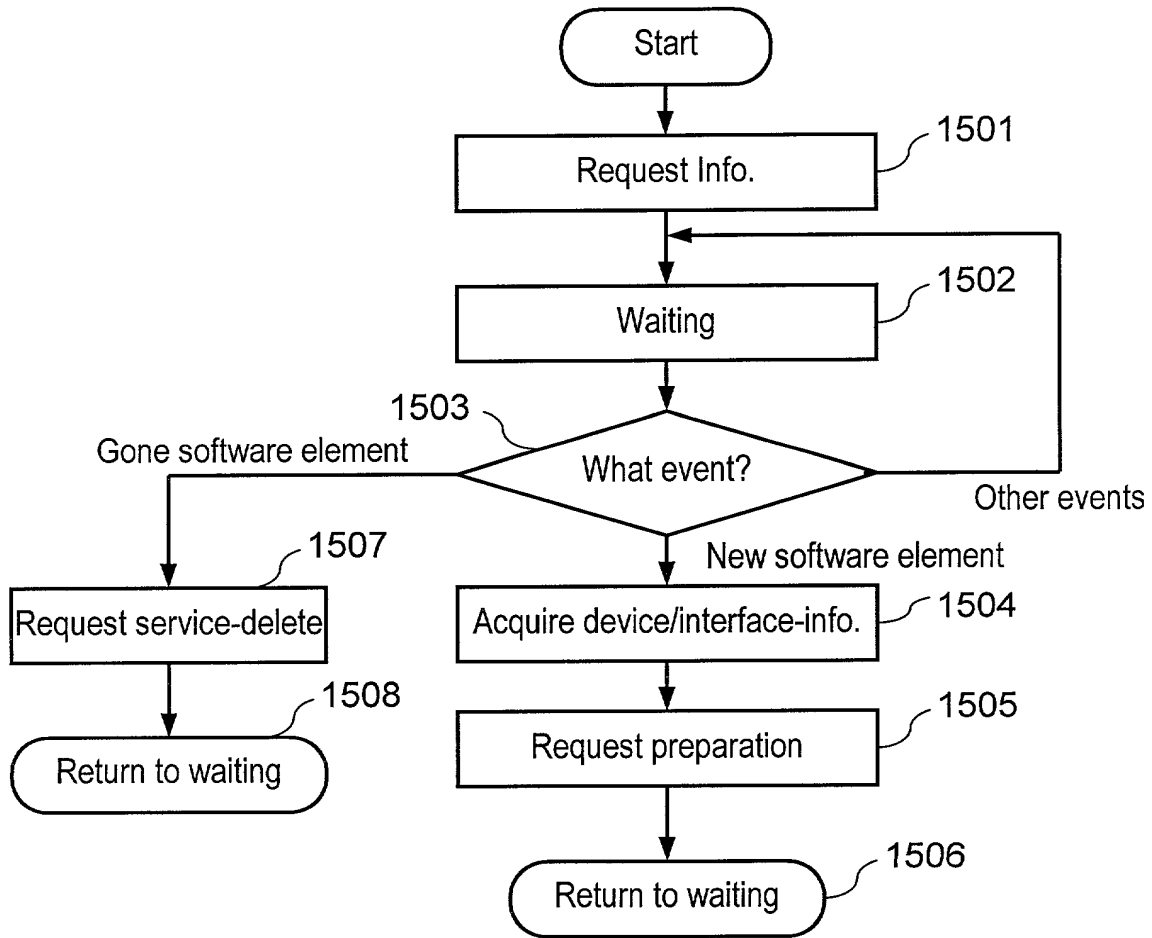


FIG. 16A

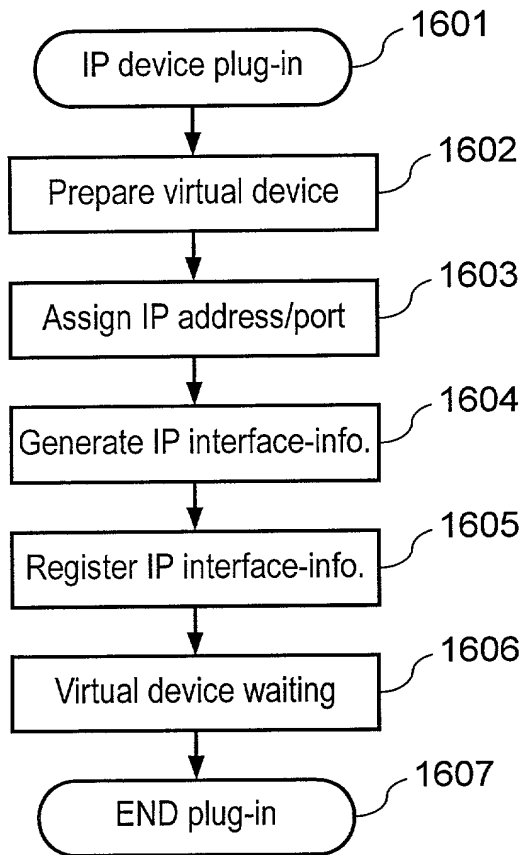


FIG. 16B

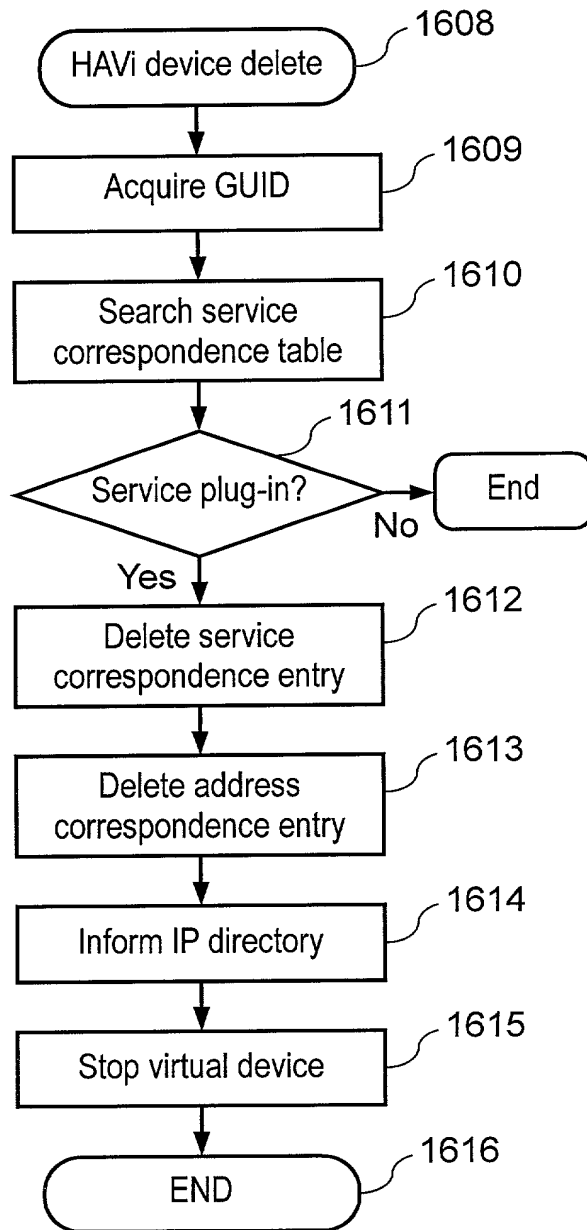




FIG. 17

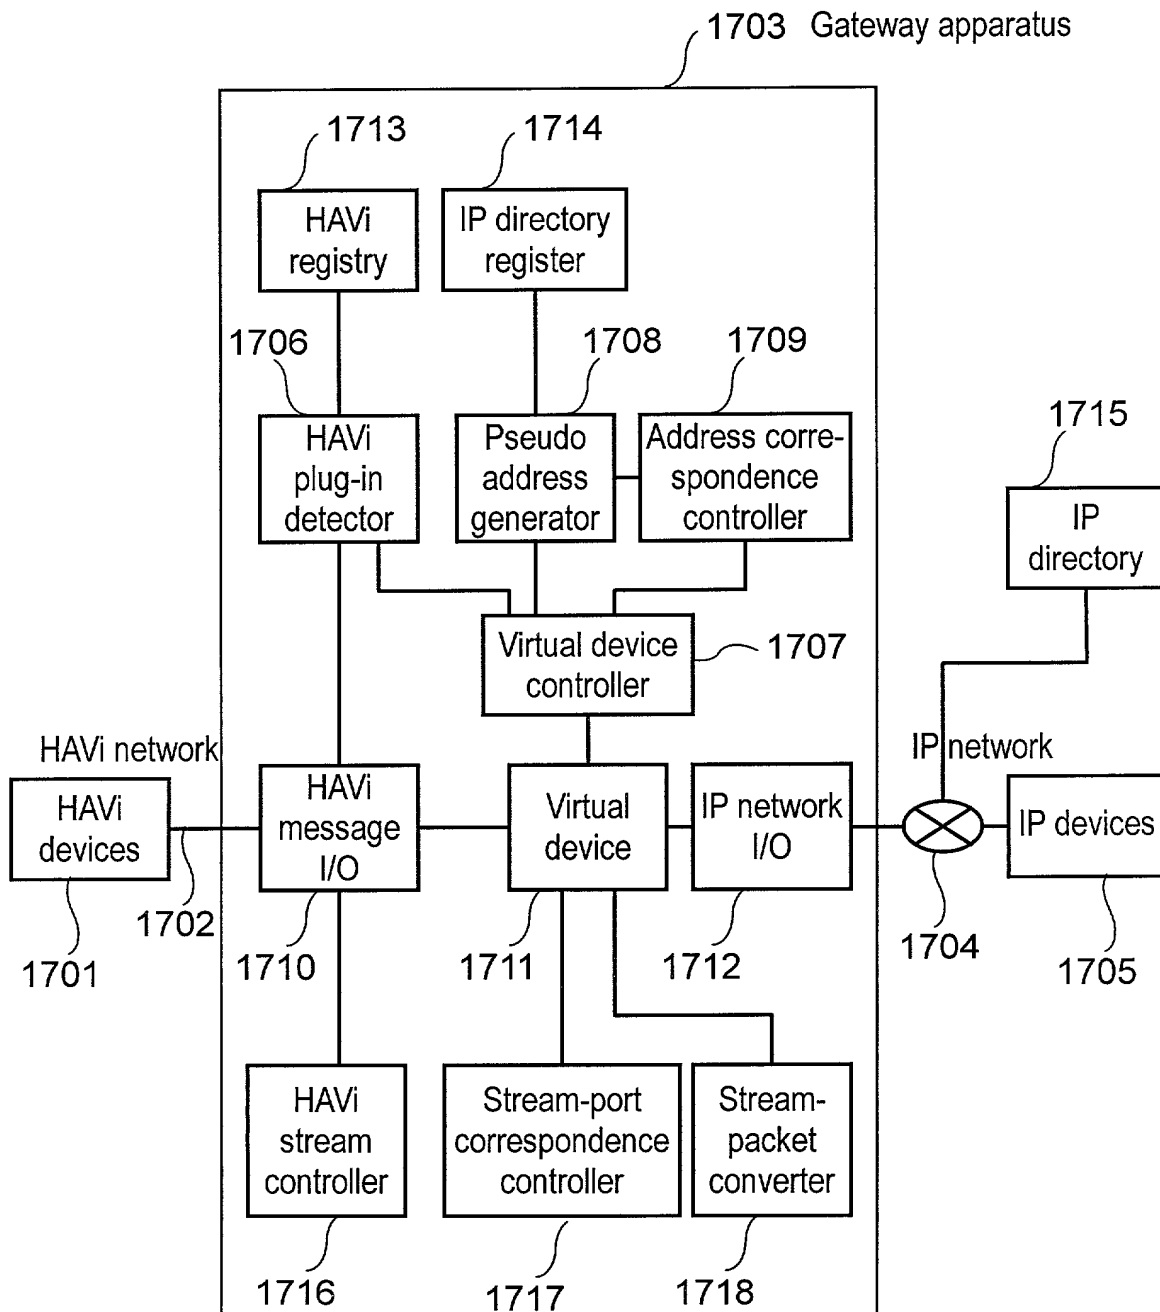


FIG. 18

Sequence diagram (Establish)

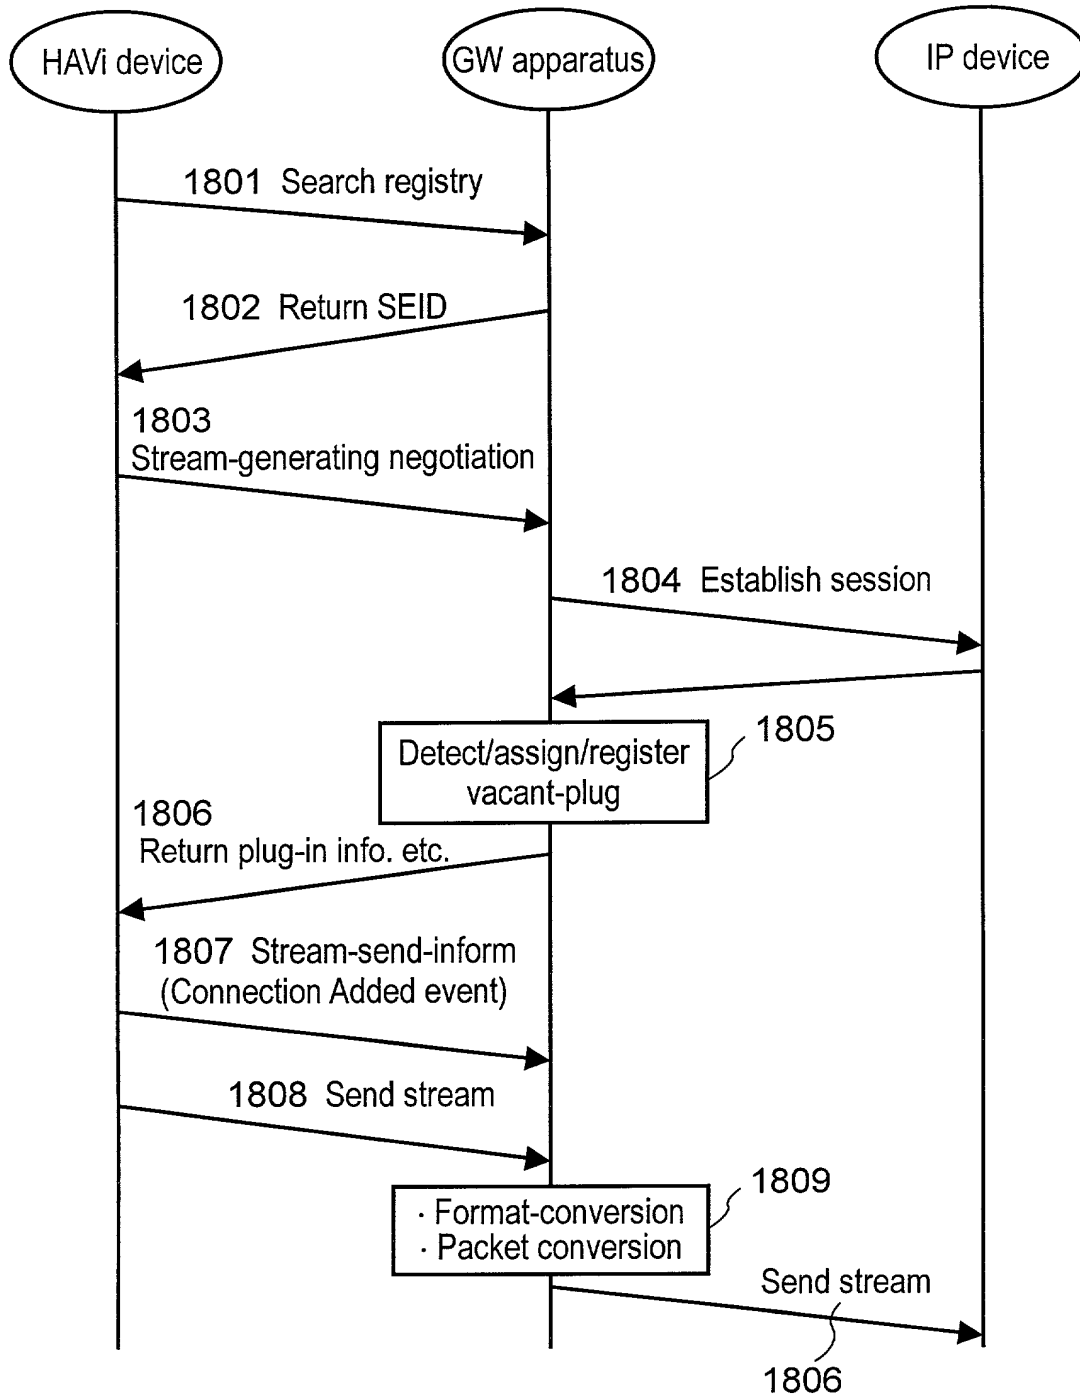


FIG. 19

Sequence diagram (disconnect)

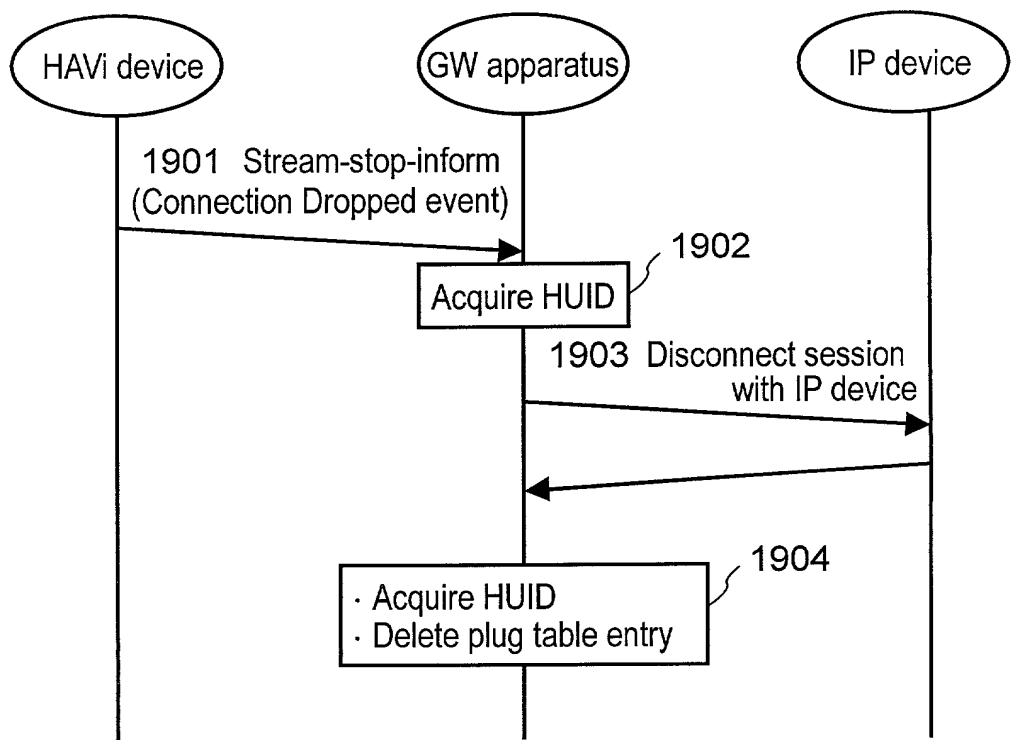


FIG. 20

2001	2002	2003	2004	2005
FCM HUID	FCM Plug No,	PCR No,	IP Port No,	
10-6	0	0.1	8082	
10-7	1	2	8083	

FIG. 21

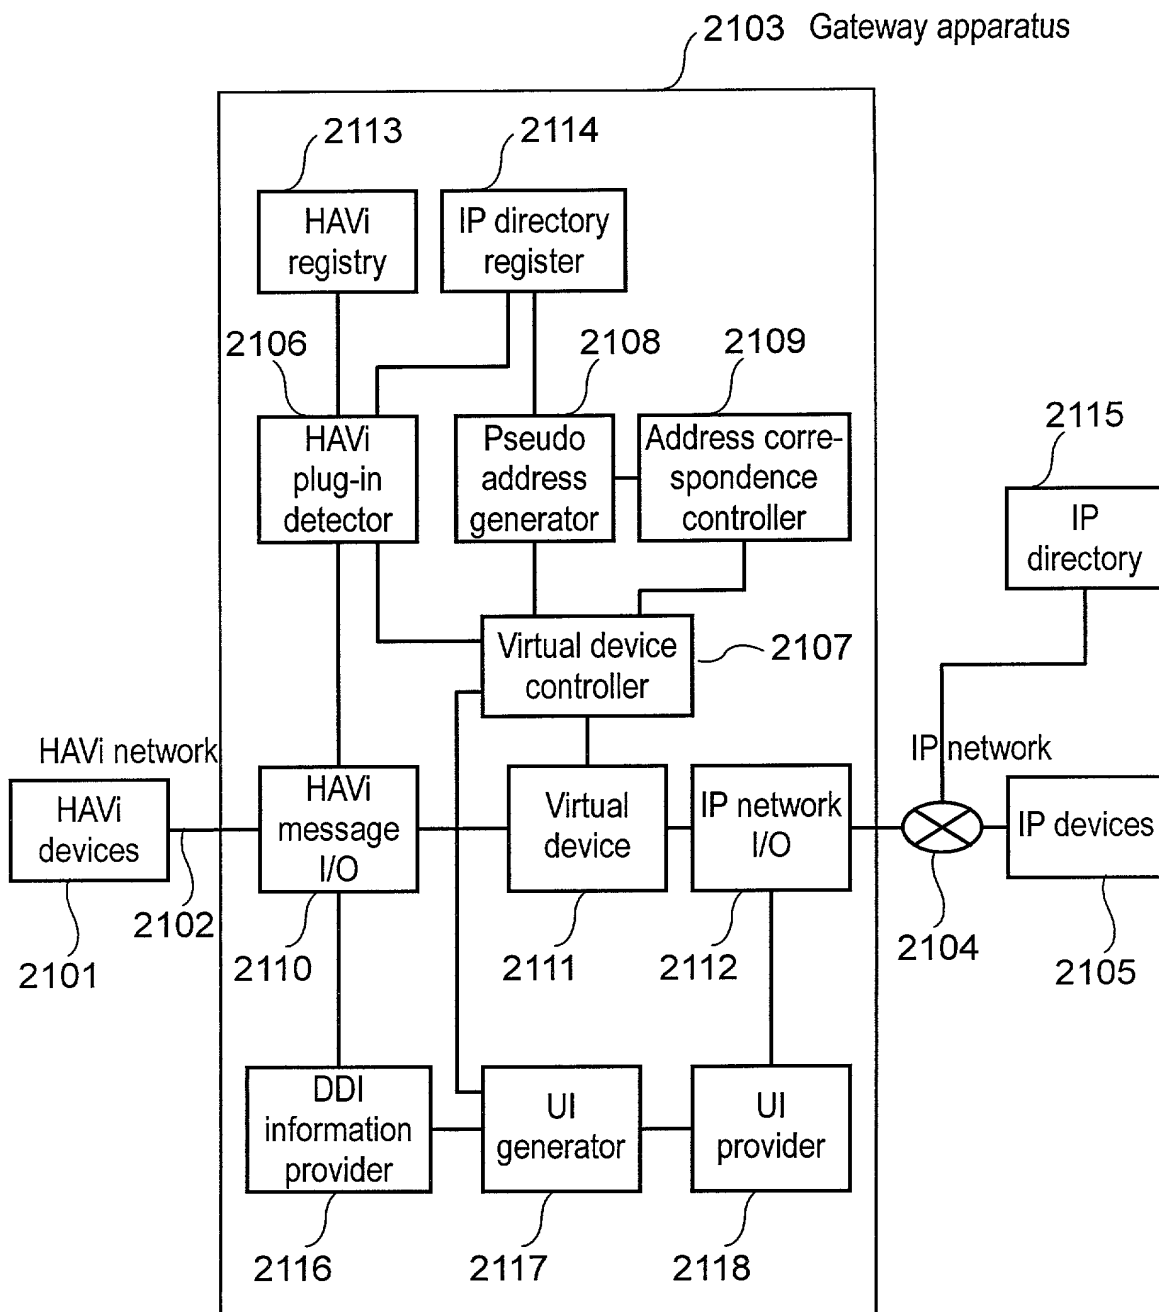


FIG. 22

DDI acquire sequence

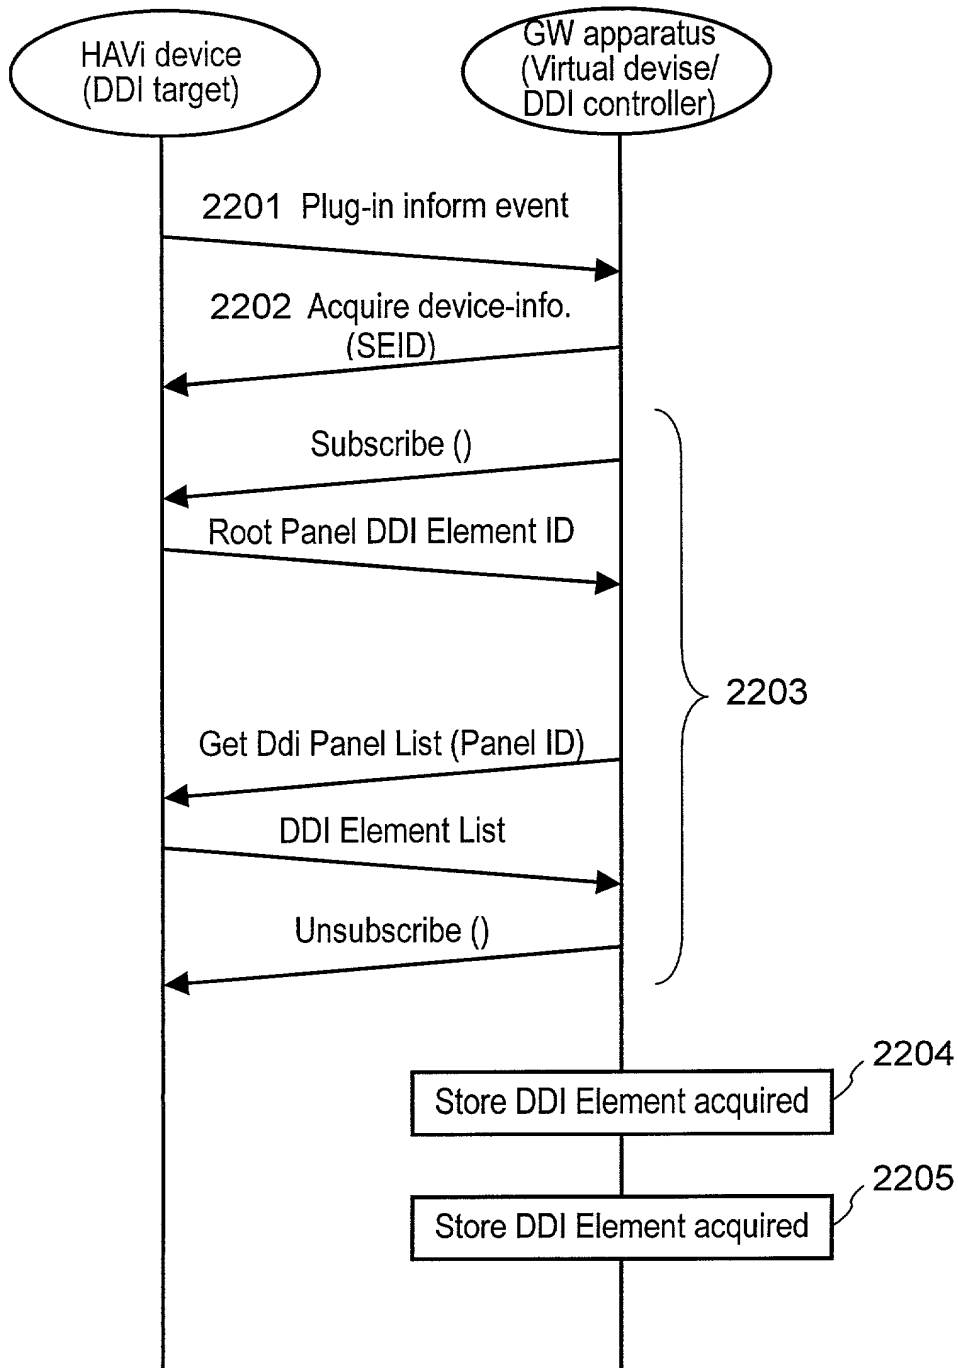


FIG. 23

GUID-operation-from-IP sequence

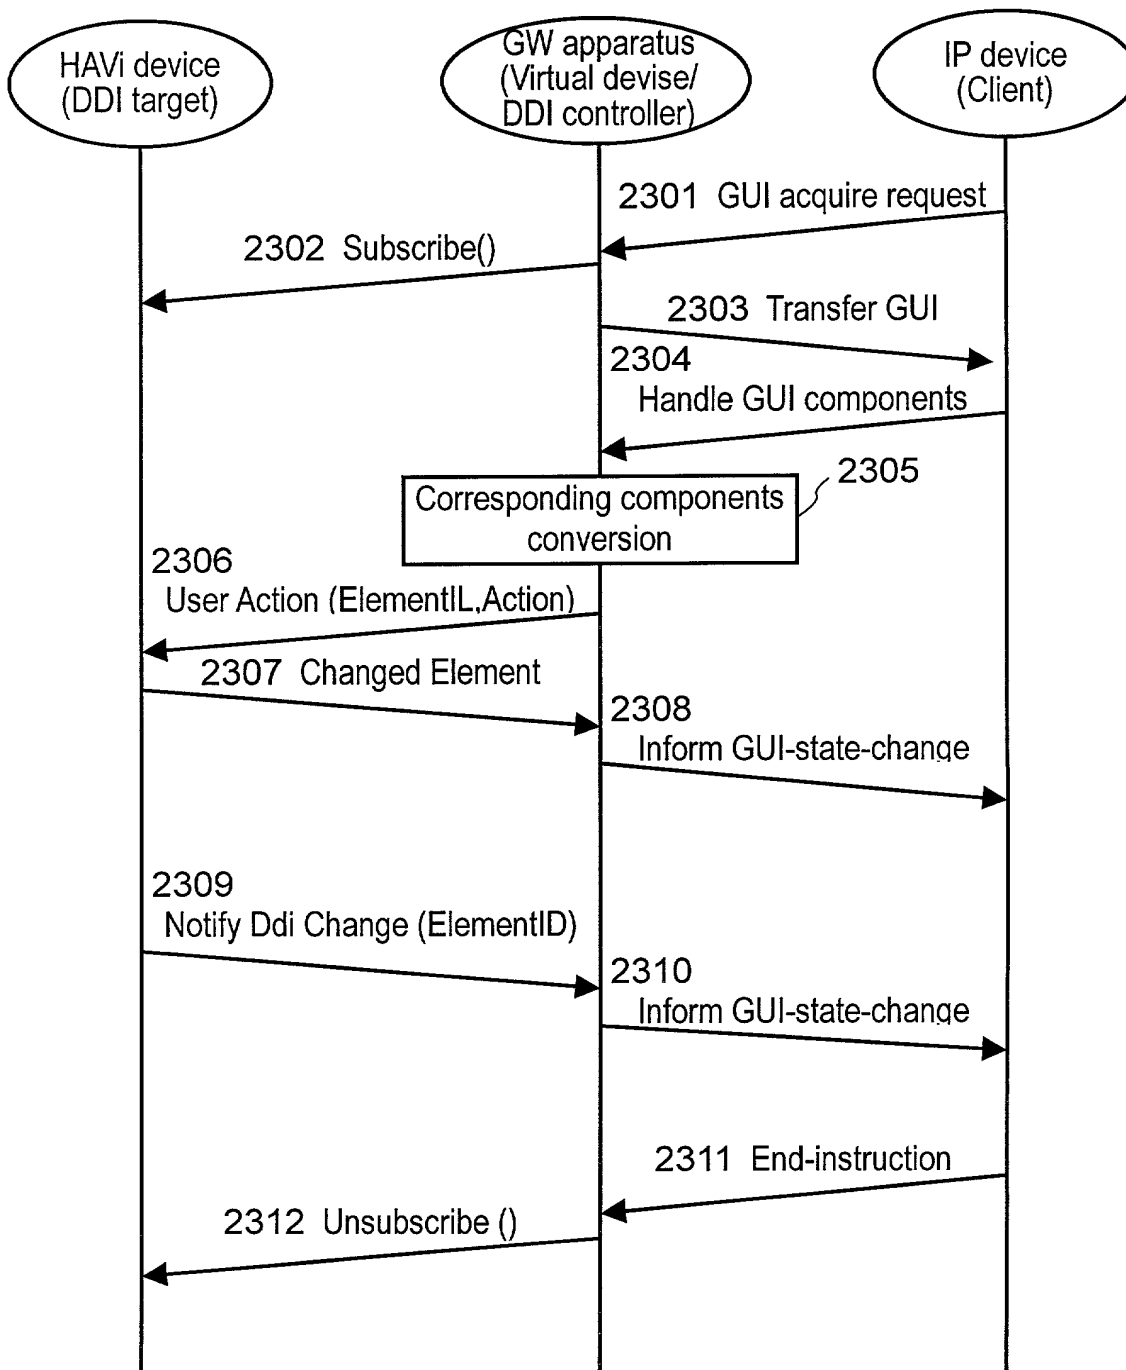


FIG. 24

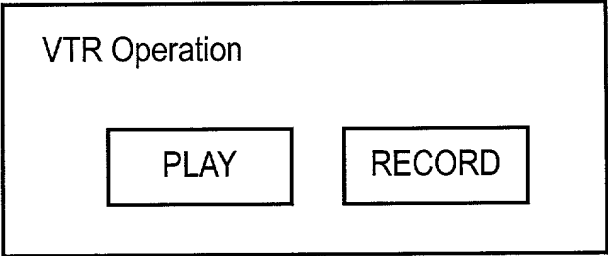


FIG. 25

HUID XXXX

Element Type	Label	Element ID
DDi Panel	VTR operation	0
DDi Button	PLAY	1
DDi Button	RECORD	2

FIG. 26

```
If(Event==Play_Pressed) then{
  CallDDi(1,Pressed);
}
elseif(Event==Record_Pressed)then{
  CallDDi(2,Pressed);
}
```

FIG. 27

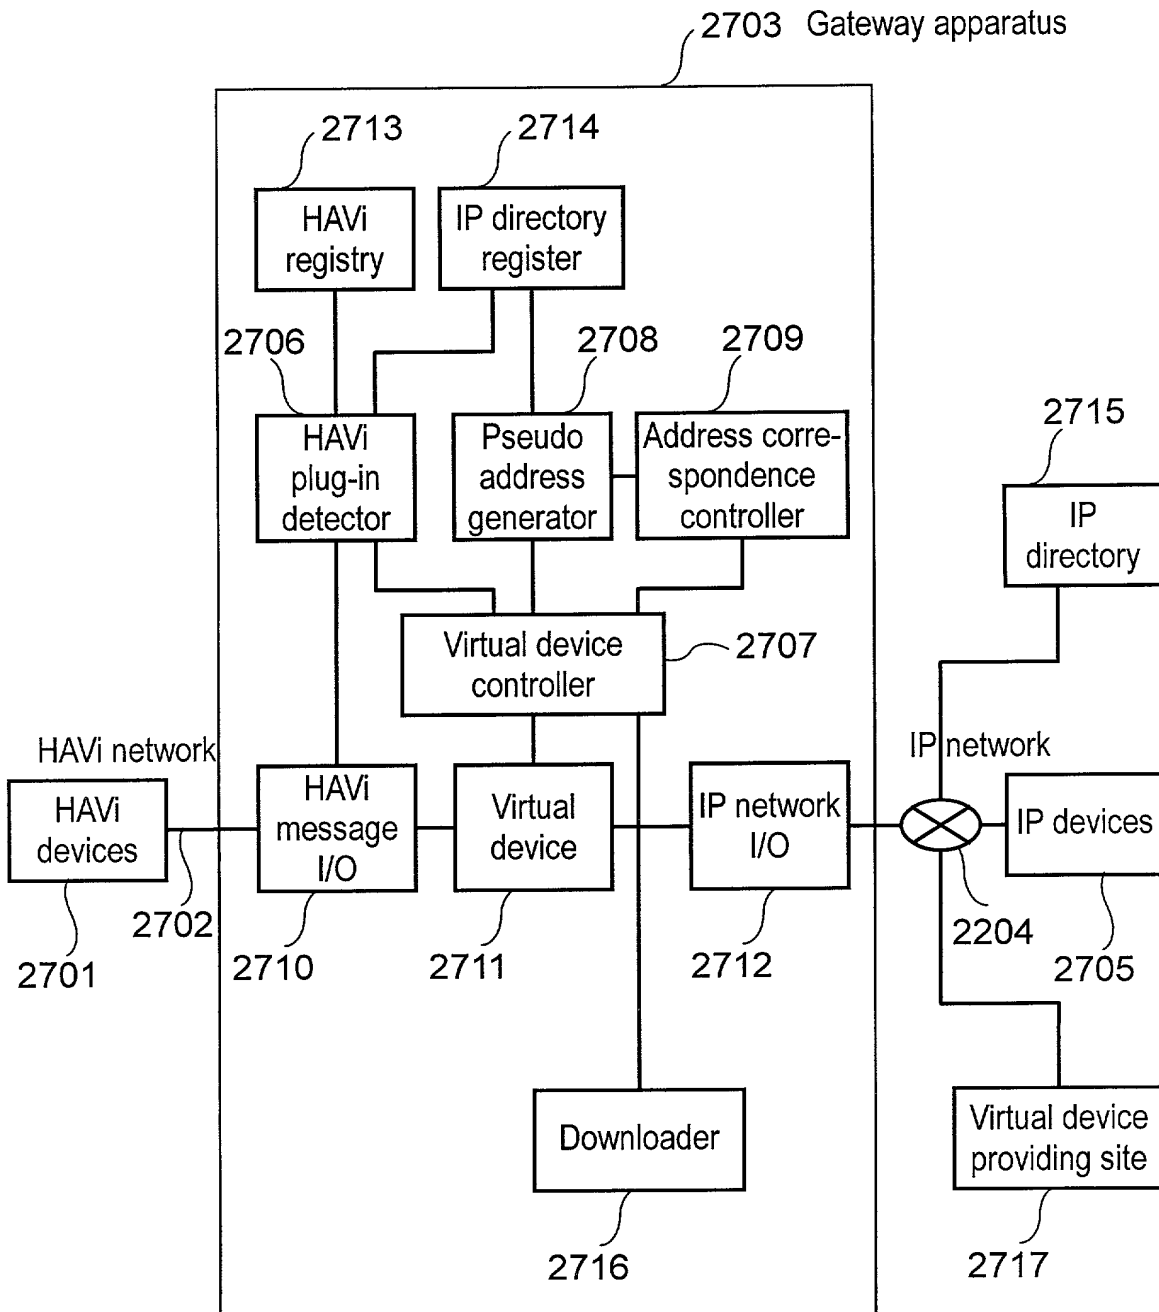


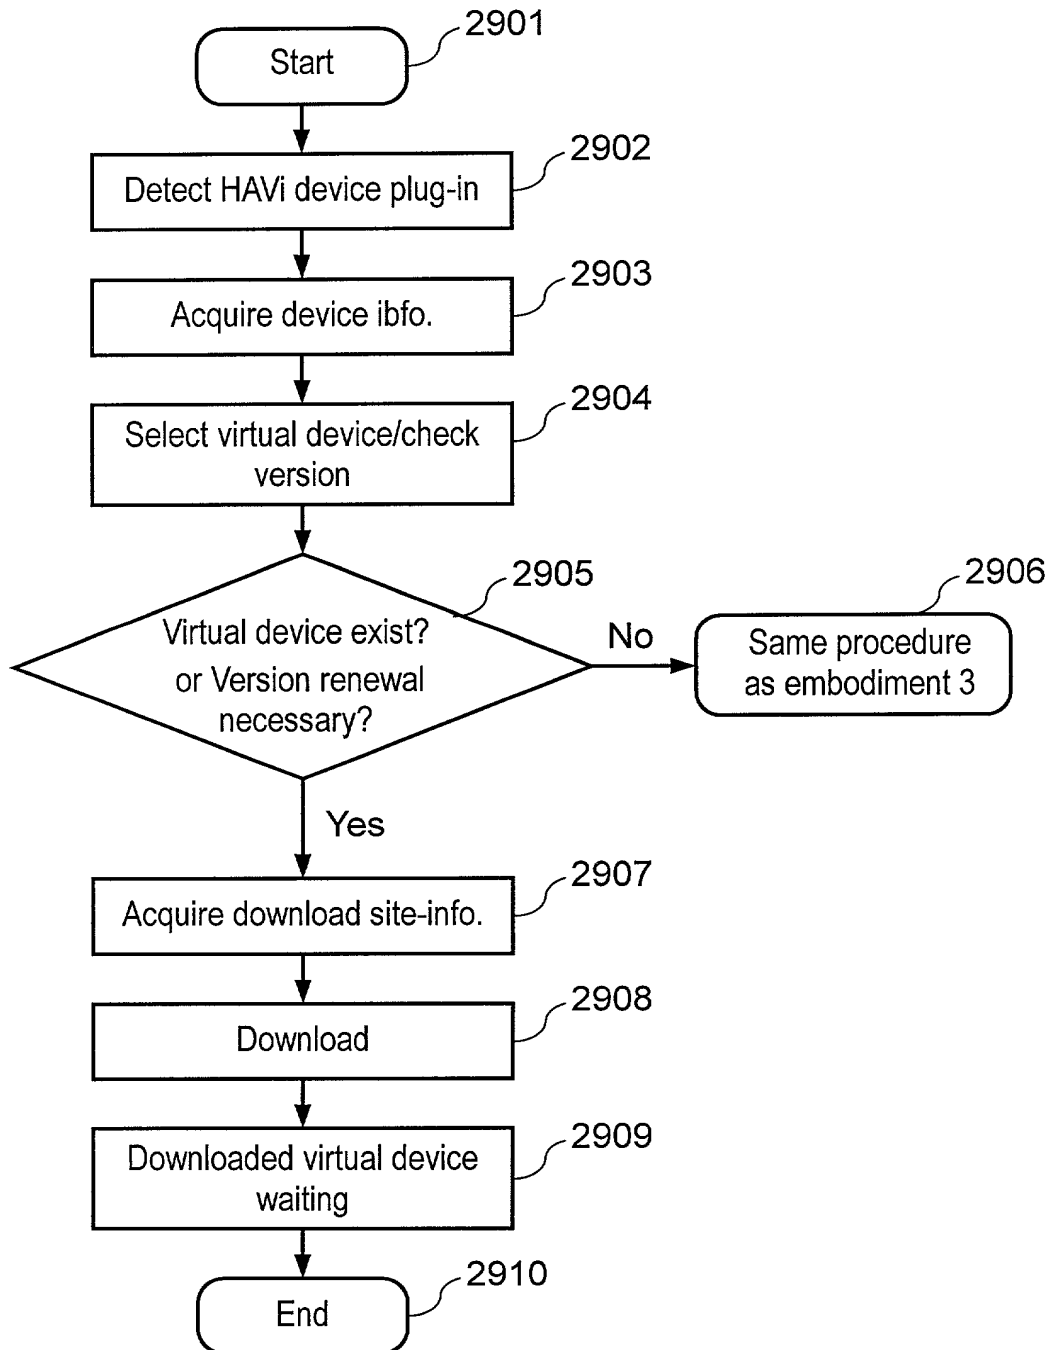


FIG. 28

Manufacturer	Device No,	URL	Current Version
XXXXXX	1234AZ1	http://www.[ ].[ ]/1234AZ1/vdevise.exe	1.02

009290" 869E0960

FIG. 29



# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled  
GATEWAY APPARATUS AND THE METHOD THEREOF,  
 the specification of which is attached hereto unless the following box is checked.

☒ was filed on \_\_\_\_\_ as  
 United States Application Number or PCT International Application Number \_\_\_\_\_  
 and was amended on June 26, 2000 by preliminary amendment.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) Priority Not Claimed

11-177916 Japan 24 June 1999  
 (Number) (Country) (Day/Month/Year Filed) ☐

\_\_\_\_\_  
 (Number) (Country) (Day/Month/Year Filed) ☐

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

\_\_\_\_\_  
 (Application Number) (Filing Date)

\_\_\_\_\_  
 (Application Number) (Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Paul F. Prestia	Reg. No. 23,031	Lawrence E. Ashery	Reg. No. 34,515	Mark J. Marcelli	Reg. No. 36,593
Allan Ratner	Reg. No. 19,717	Christopher R. Lewis	Reg. No. 36,201	Jack J. Jankowitz	Reg. No. 42,690
Andrew L. Ney	Reg. No. 20,300	Robert L. Andersen	Reg. No. 25,771	Jonathan H. Spadt	Reg. No. 45,122
Kenneth N. Nigon	Reg. No. 31,549	Joshua L. Cohen	Reg. No. 38,040	Christopher I. Halliday	Reg. No. 42,621
Kevin R. Casey	Reg. No. 32,117	Daniel N. Calder	Reg. No. 27,424	Scott A. McKeown	Reg. No. 42,866
Benjamin E. Leace	Reg. No. 33,412	Louis W. Beardell, Jr.	Reg. No. 40,506		
James C. Simmons	Reg. No. 24,842	Jacques L. Etkowicz	Reg. No. 41,738		

Address all correspondence to: Lawrence E. Ashery

Ratner & Prestia, Suite 301, One Westlakes, Berwyn, P.O. Box 980, Valley Forge, PA 19482-0980

Address all telephone calls to: Lawrence E. Ashery at (610) 407-0700.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1004 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Akira Ishikawa

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Kanagawa, Japan

Citizenship Japanese

Post Office Address 2-12-3-301, Seki, Tama-ku, Kawasaki-shi,

Kanagawa, 214-0022 Japan

Full name of second joint inventor, if any (given name, family name) Teruki Niki

Second Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Tokyo, Japan

Citizenship Japanese

Post Office Address 3-27-8-307, Minamishinozaki-cho, Edogawa-ku,

Tokyo, 133-0065 Japan



Additional inventors are being named on separately numbered sheets attached hereto.

Full name of third joint inventor, if any (given name, family name) Takashi Mitoh

Third inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Saitama, Japan

Citizenship Japanese

Post Office Address 3-14-21-801, Namiki, Kawaguchi-shi,  
Saitama, 332-0034 Japan

Full name of fourth joint inventor, if any (given name, family name) Masaomi Ueda

Fourth inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Saitama, Japan

Citizenship Japanese

Post Office Address 2012-2, Daitakubo, Urawa-shi,  
Saitama, 336-0015 Japan

Full name of fifth joint inventor, if any (given name, family name) Tetsuya Hino

Fifth inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence Tokyo, Japan

Citizenship Japanese

Post Office Address 2-20-5-632, Higashirokugo, Ota-ku,  
Tokyo, 144-0046 Japan

Full name of sixth joint inventor, if any (given name, family name) \_\_\_\_\_

Sixth inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of seventh joint inventor, if any (given name, family name) \_\_\_\_\_

Seventh inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_